


Lecture 3:

Intro to Signal Processing:

Sampling and Aliasing

Computer Graphics and Imaging

UC Berkeley CS184

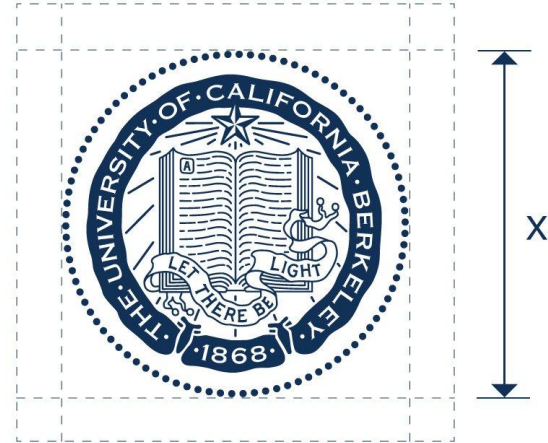

**In nature, most signals are
defined over continuous domain**

Light Signal




Sampling is the process of transforming a continuous signal into a discrete one.



Antonio Torralba

Sampling Artifacts in Computer Graphics and Imaging

Rasterization = Sample 2D Positions

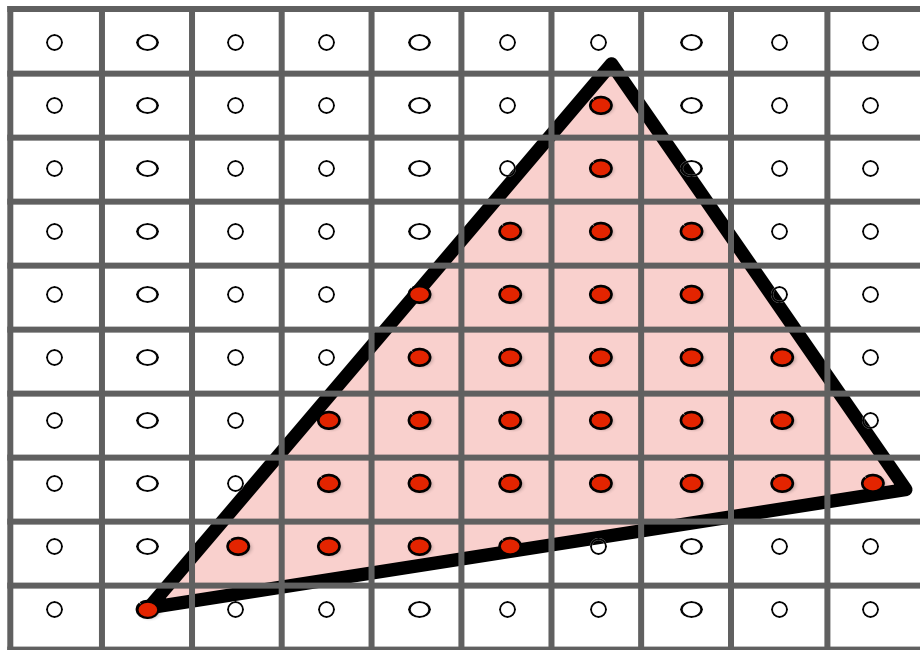

Jaggies (Staircase Pattern)

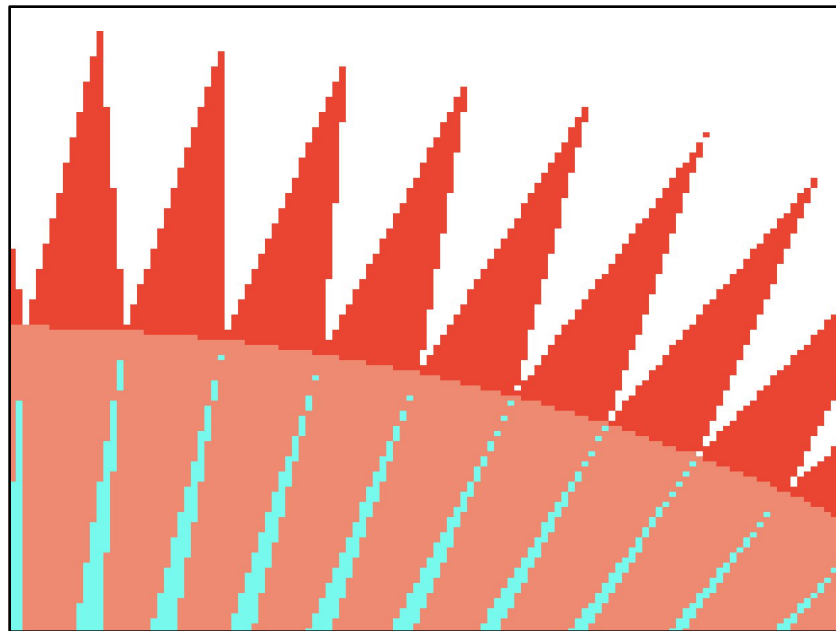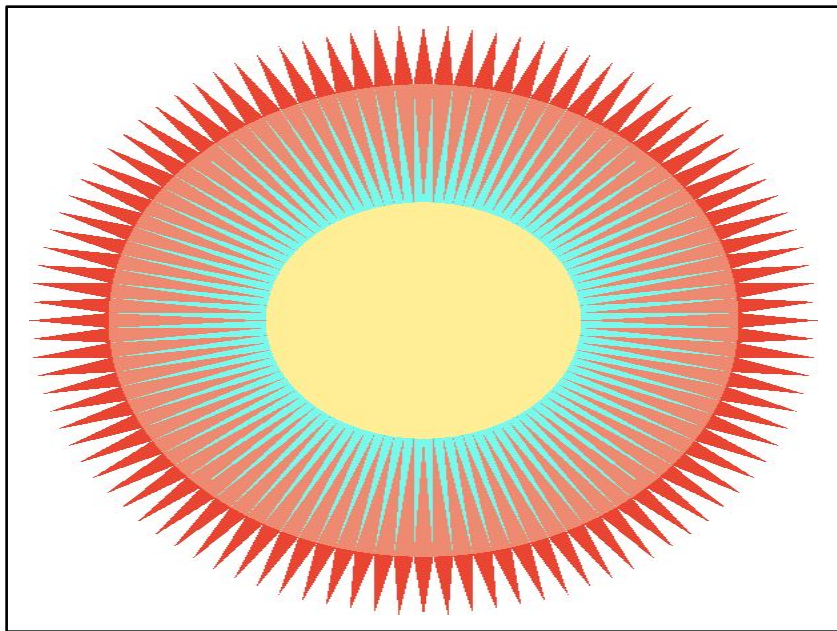


This is an example of “aliasing” – a sampling error

Photograph = Sample Image Sensor Plane





Video = Sample Time


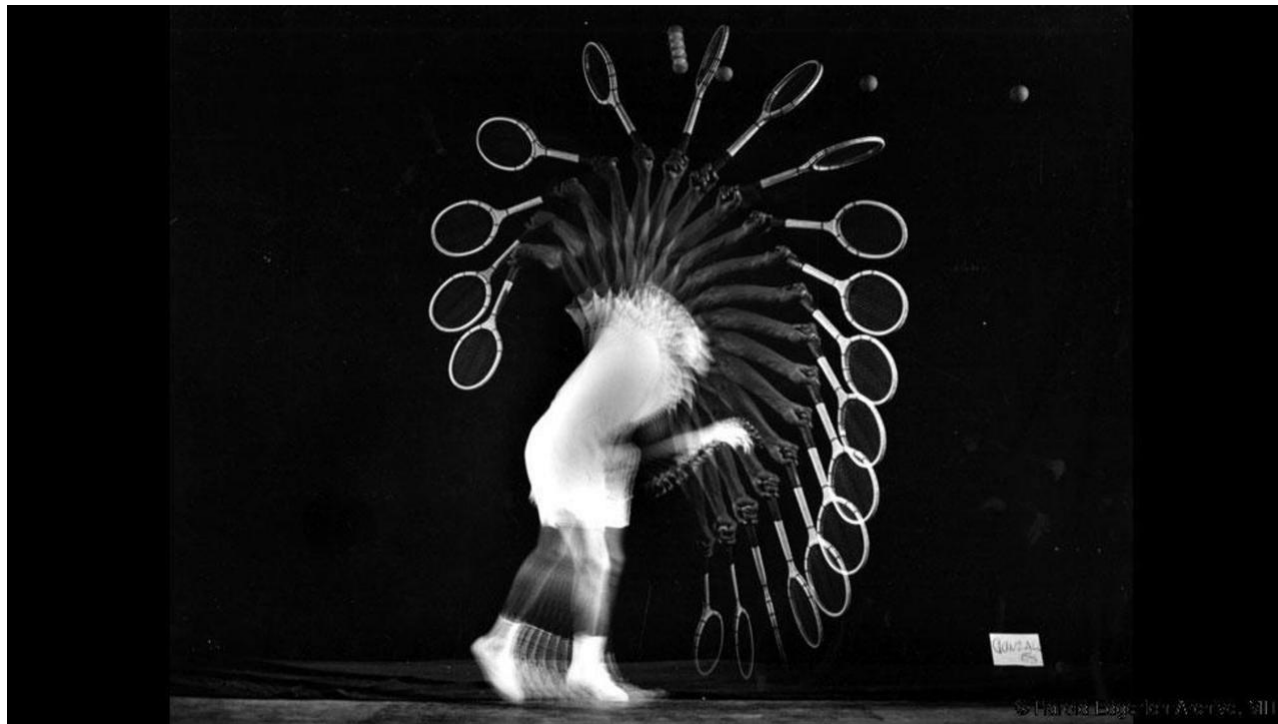


Harold Edgerton Archive, MIT

Ray Tracing = Sample Rays

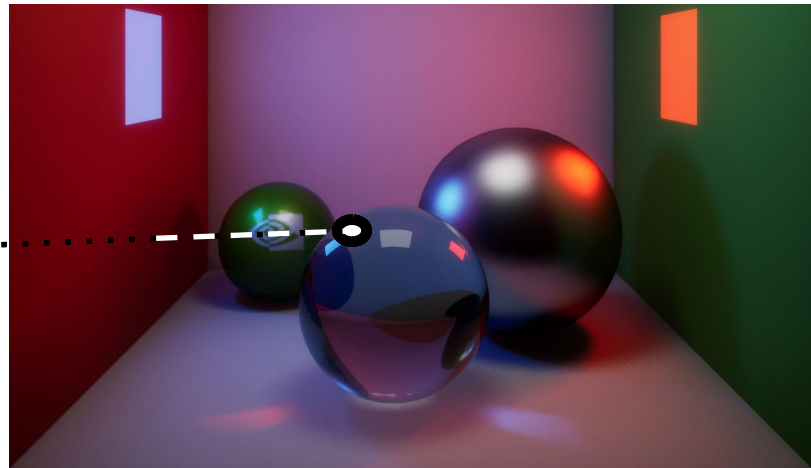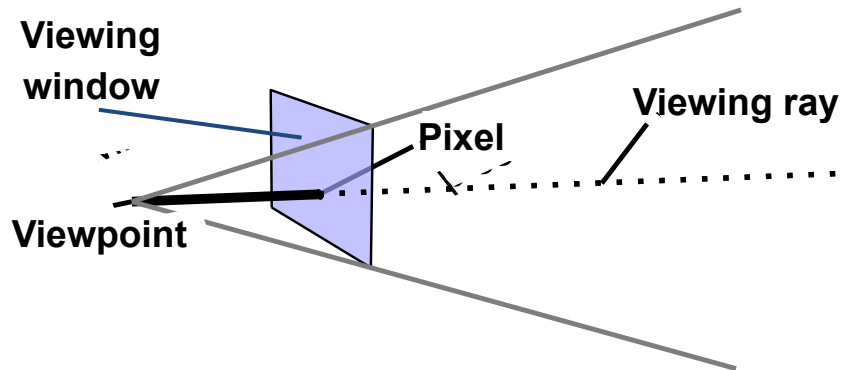


Jaggies (Staircase Pattern)

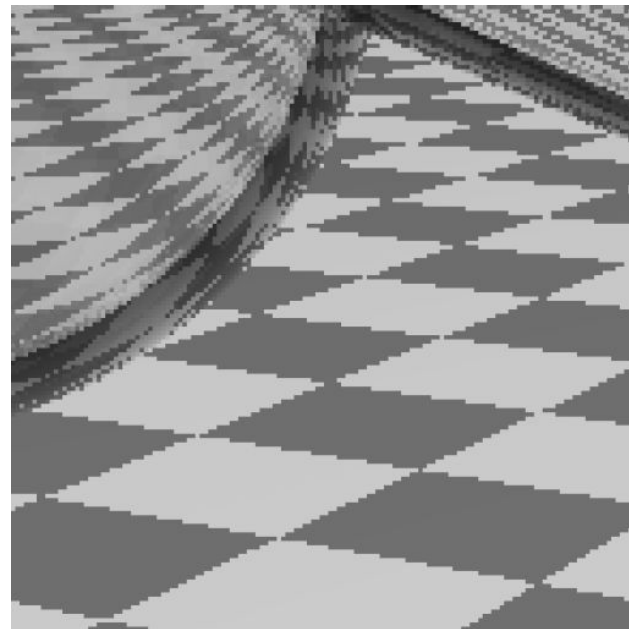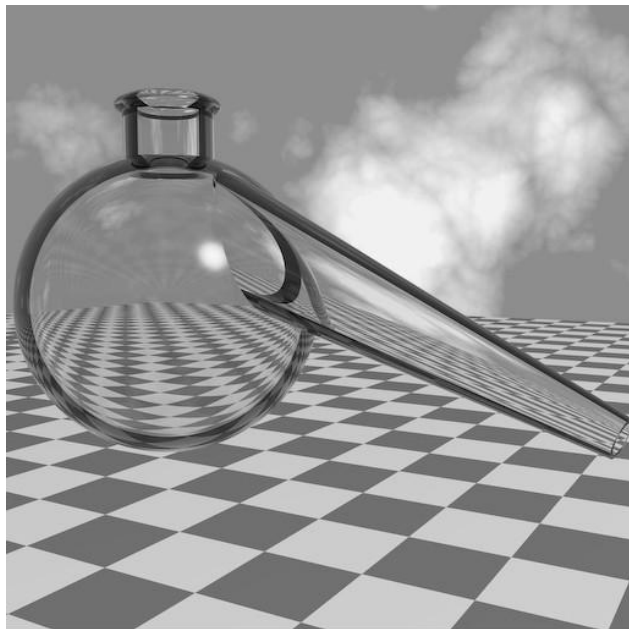

Retort by Don Mitchell

Lighting Integrals: Sample Incident Angles

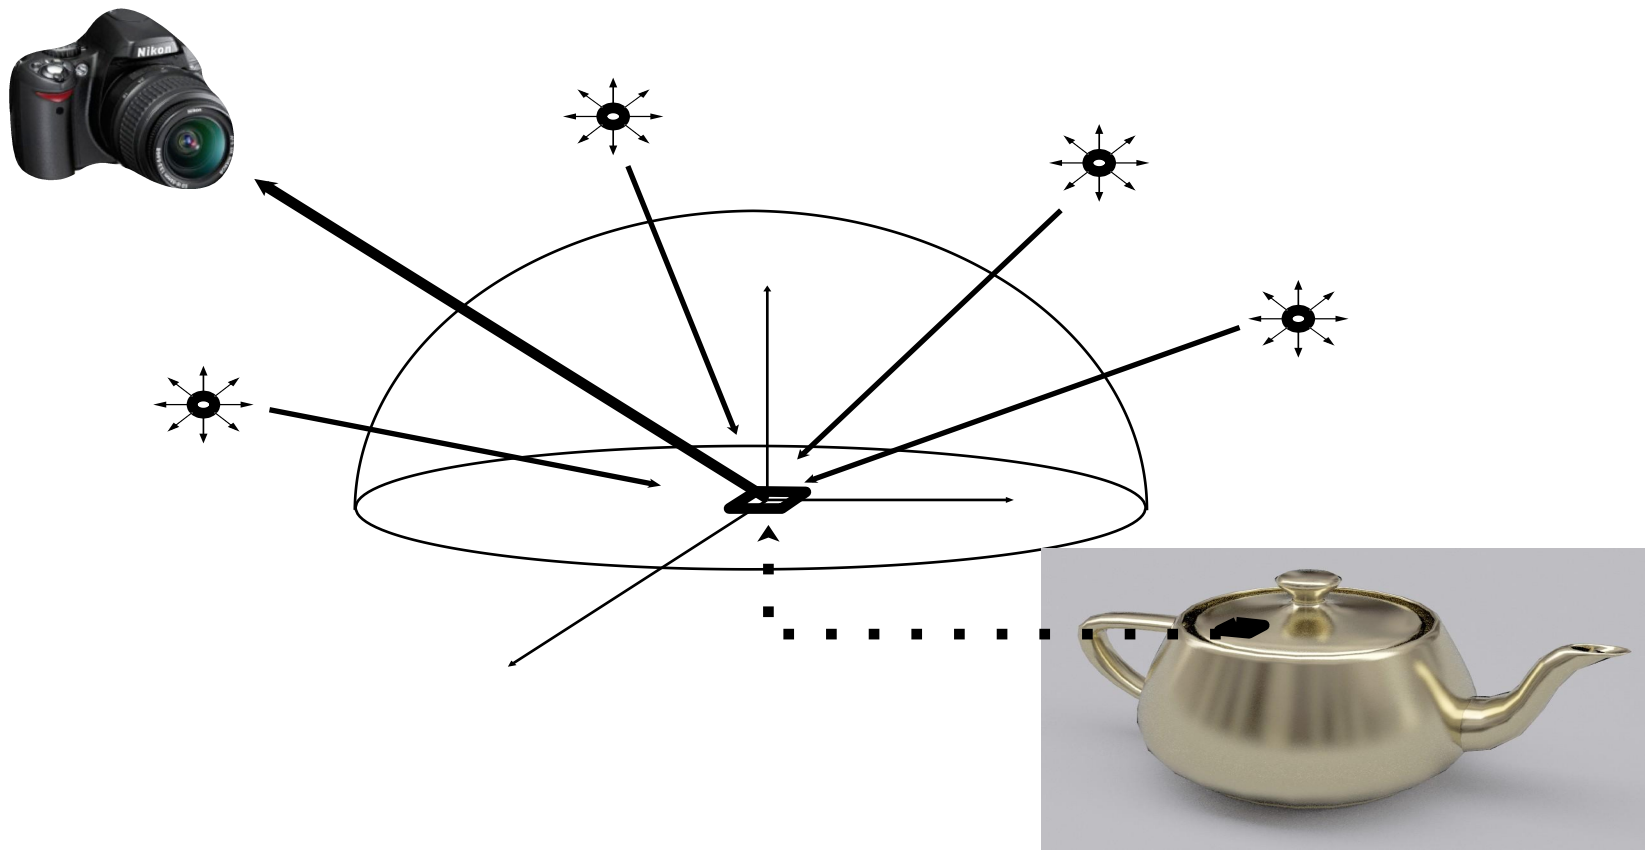


Video: Point Sampling vs Antialiased Sampling in Time

Thin stream of water from kitchen tap



Point in Time $1/4000$ sec
exposure

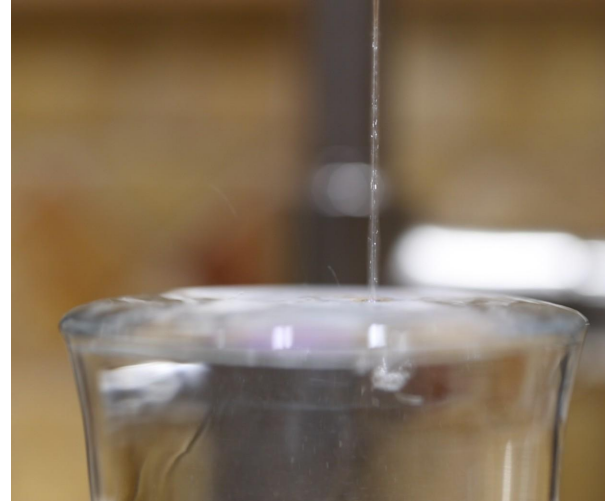


Motion Blurred $1/60$
sec exposure

Wagon Wheel Illusion (False Motion)



Created by Jesse Mason, https://www.youtube.com/watch?v=Q0wzkND_oU

Moiré Patterns in Imaging

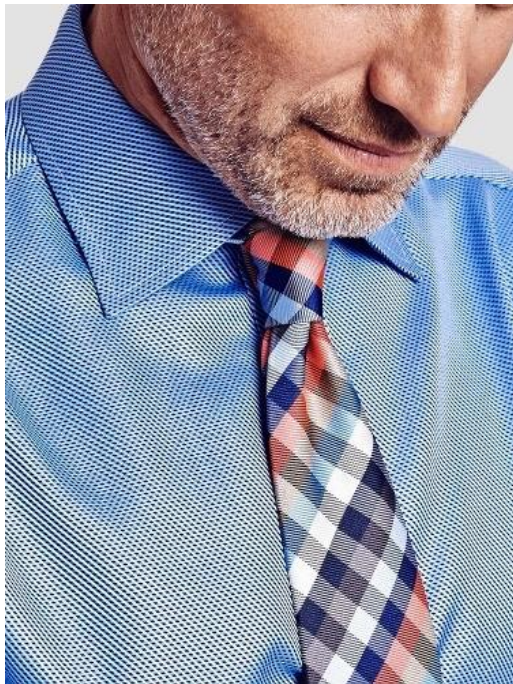

Read every sensor pixel



Skip odd rows and columns

Sampling Artifacts in Computer Graphics

Artifacts due to sampling - “Aliasing”

- **Jaggies** – sampling in the spatial domain
- **Wagon wheel effect** – sampling in time
- **Moire** – undersampling images (and texture maps)
- [Many more] ...

*** Aliasing is when we sample fast-changing signals (high frequency), too slowly**

Antialiasing Idea: Filter Out High Frequencies Before Sampling

Video: Point Sampling in Time




60 fps video. $1/4000$ second exposure is sharp in time, causes time aliasing.

Video: Motion-Blurred (Antialiased) Sampling in Time




60 fps video. $1/60$ second exposure is motion-blurred in time, no aliasing.

Rasterization: Point Sampling in Space

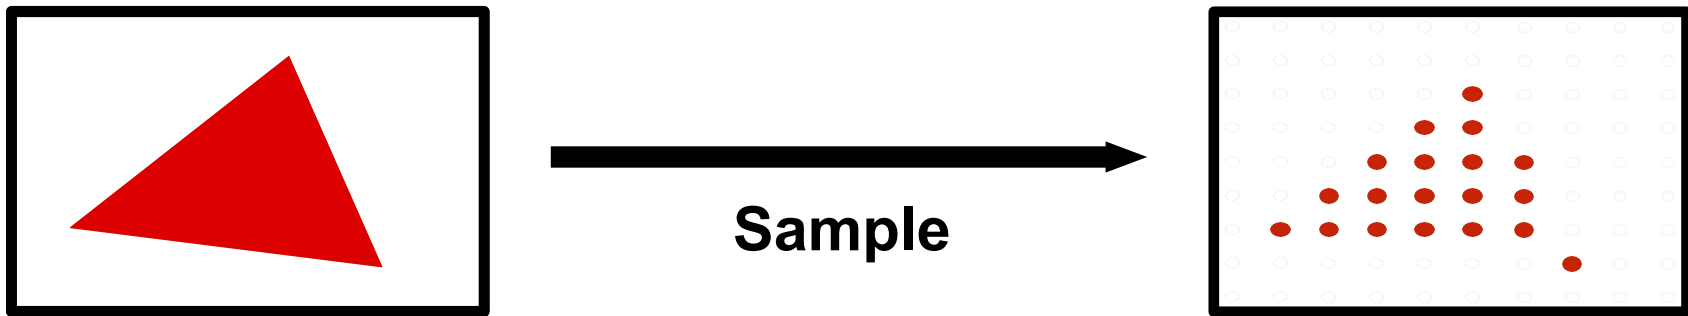

**Note jaggies in rasterized triangle
where pixel values are pure red or white**

Rasterization: Antialiased Sampling

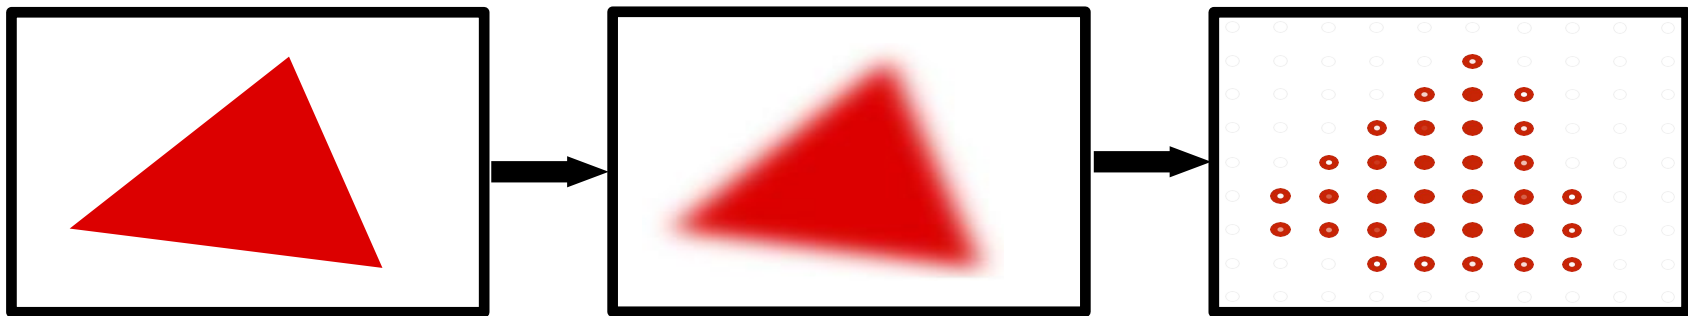



Pre-Filter

(remove frequencies above Nyquist)

Sample



**Note antialiased edges in rasterized triangle
where pixel values take intermediate values**

Point Sampling

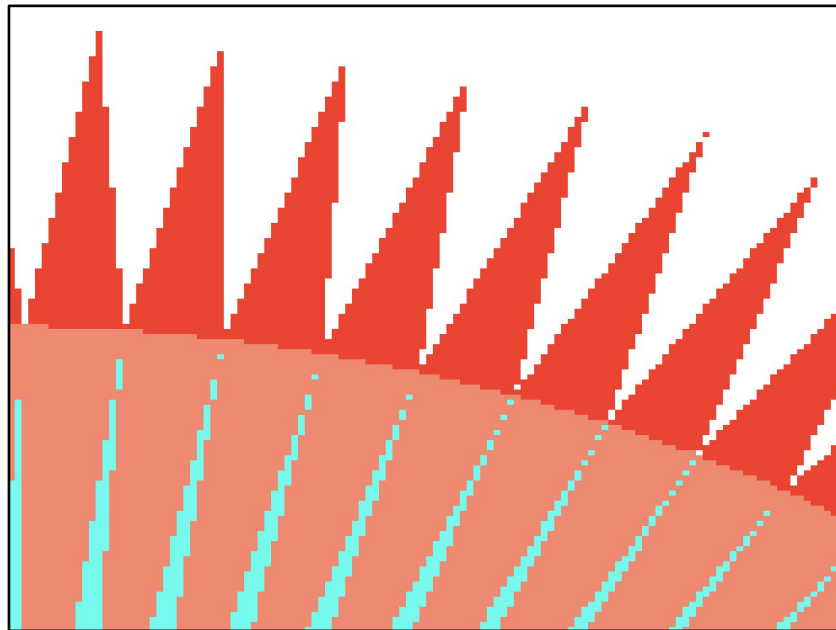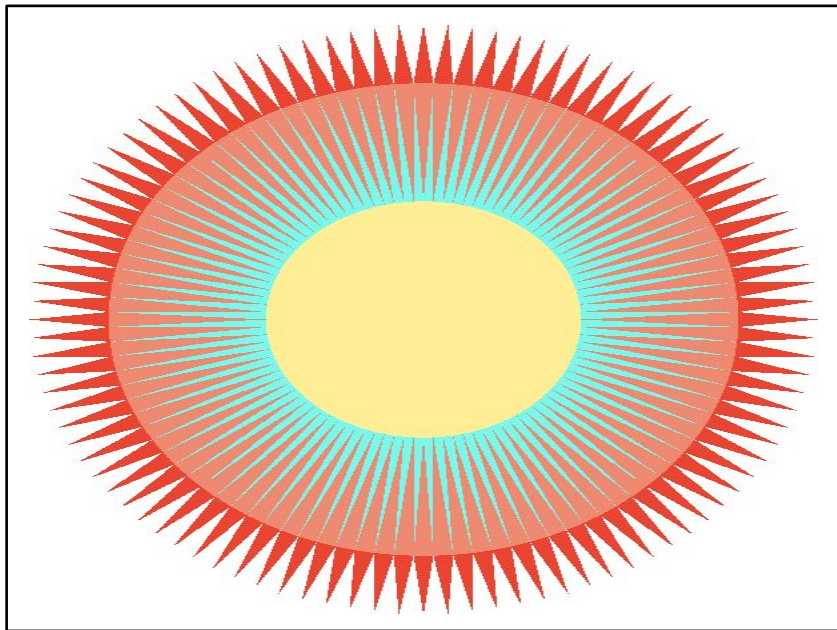


One sample per pixel


Antialiasing

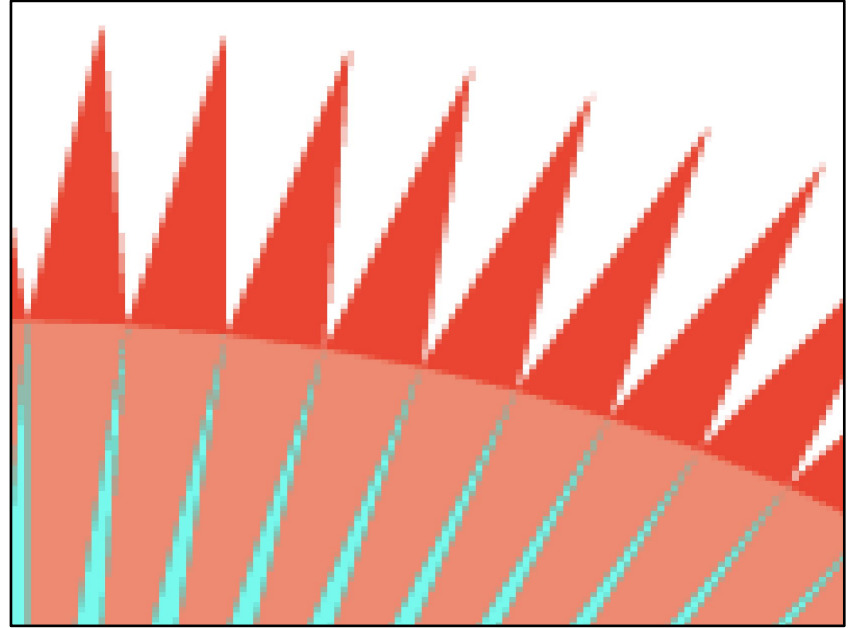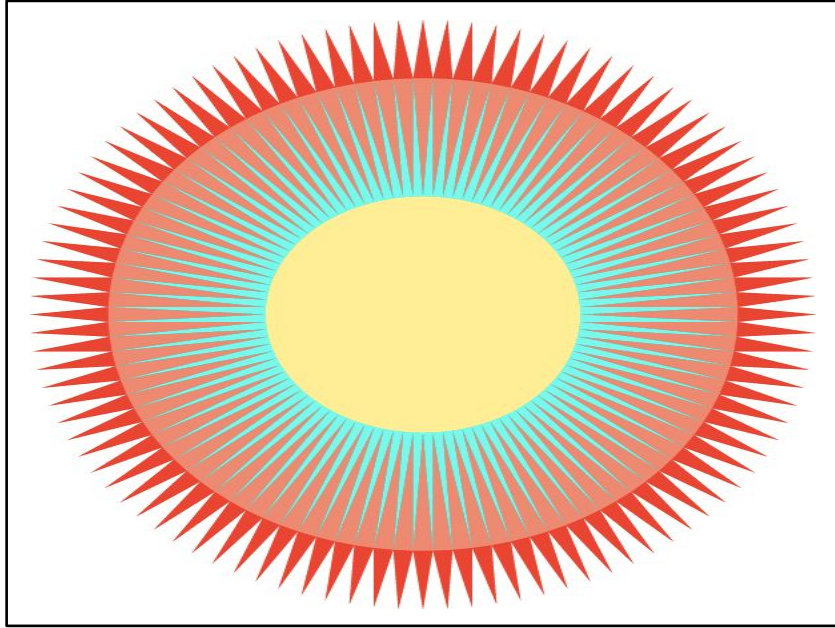

Point Sampling vs Antialiasing

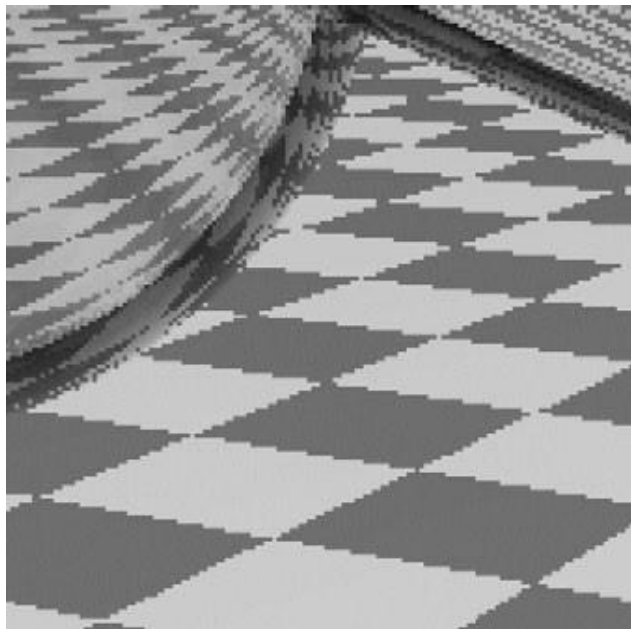


Jaggies

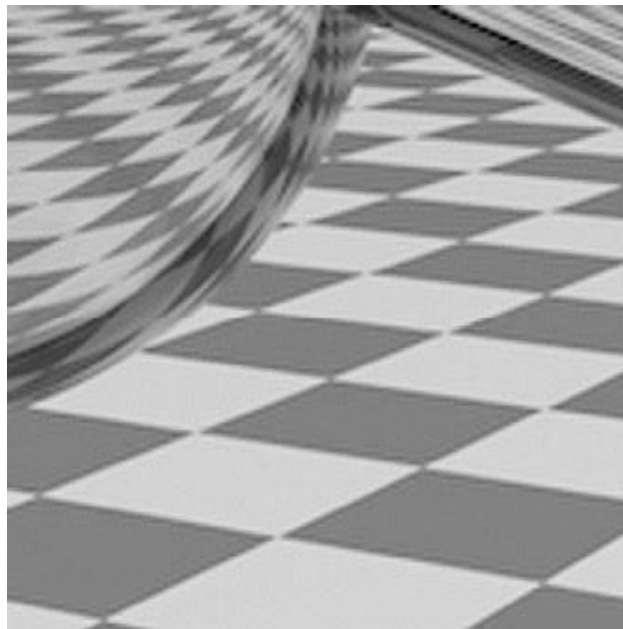


Pre-Filtered

Antialiasing vs Blurred Aliasing

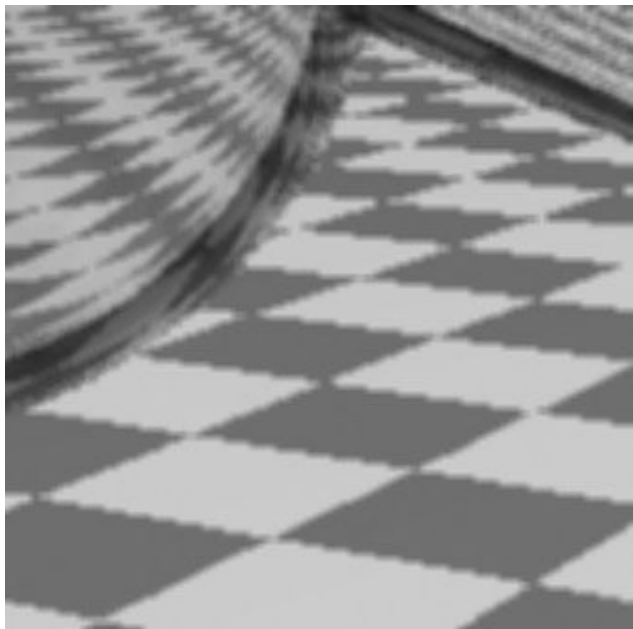

Blurred Jaggies
(Sample then filter)

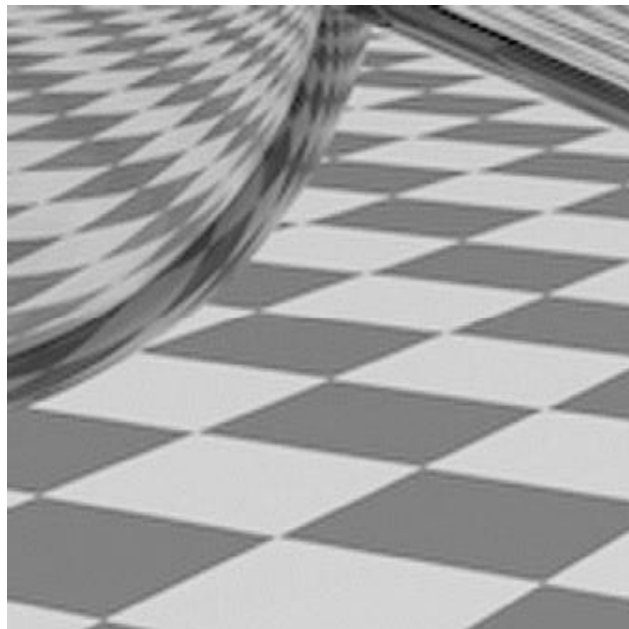


Pre-Filtered
(Filter then sample)

This Lecture


**Let's dig into the fundamental reasons why this works And
look at how to implement antialiased rasterization**

Frequency Space

Sines and Cosines

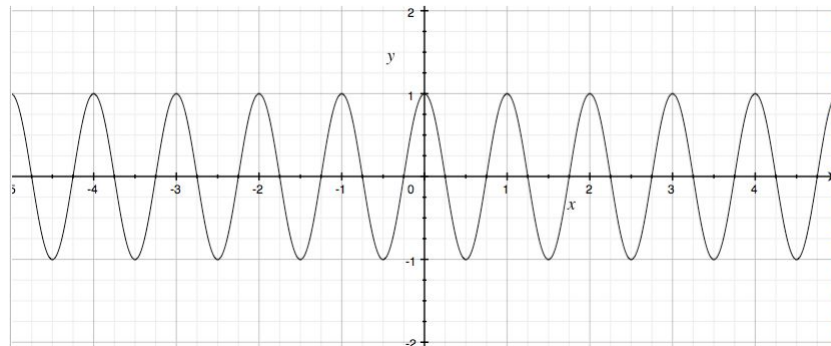


$\cos 2x$

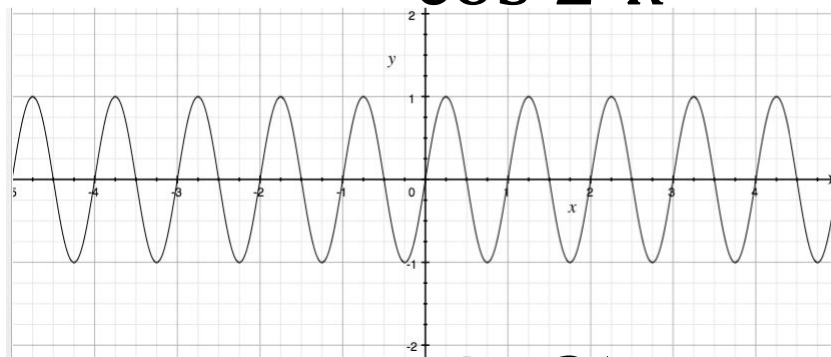

$\sin 2x$


Frequencies $\cos 2\uparrow f x$

$$f = \frac{1}{T}$$

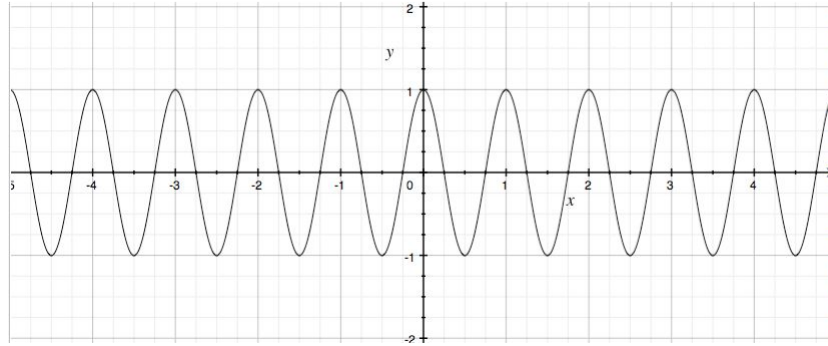

$$f = 1$$

$$\cos 2\uparrow x$$

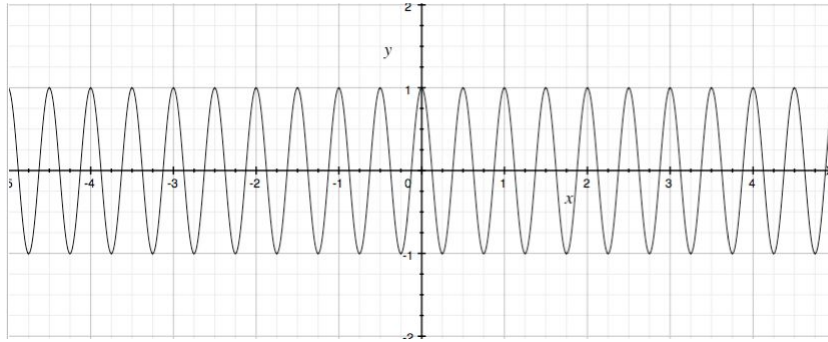

$$f = 2$$


$$\cos 4\uparrow x$$

Fourier Transform

Represent a function as a weighted sum of sines and cosines




Joseph Fourier 1768 - 1830

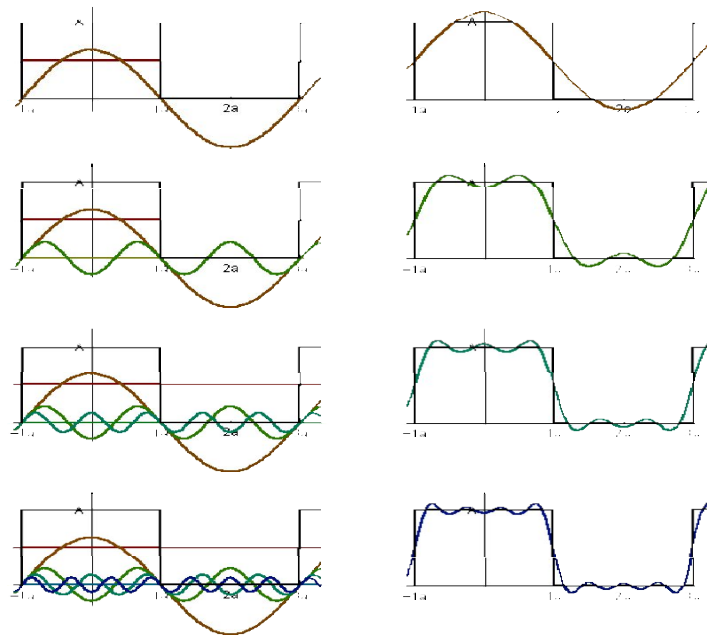


$$f(x) = \frac{A}{2} + \frac{2A \cos(tw)}{\pi} - \frac{2A \cos(3tw)}{3\pi} + \frac{2A \cos(5tw)}{5\pi} - \frac{2A \cos(7tw)}{7\pi} + \dots$$


Fourier Transform Decomposes A Signal Into Frequencies

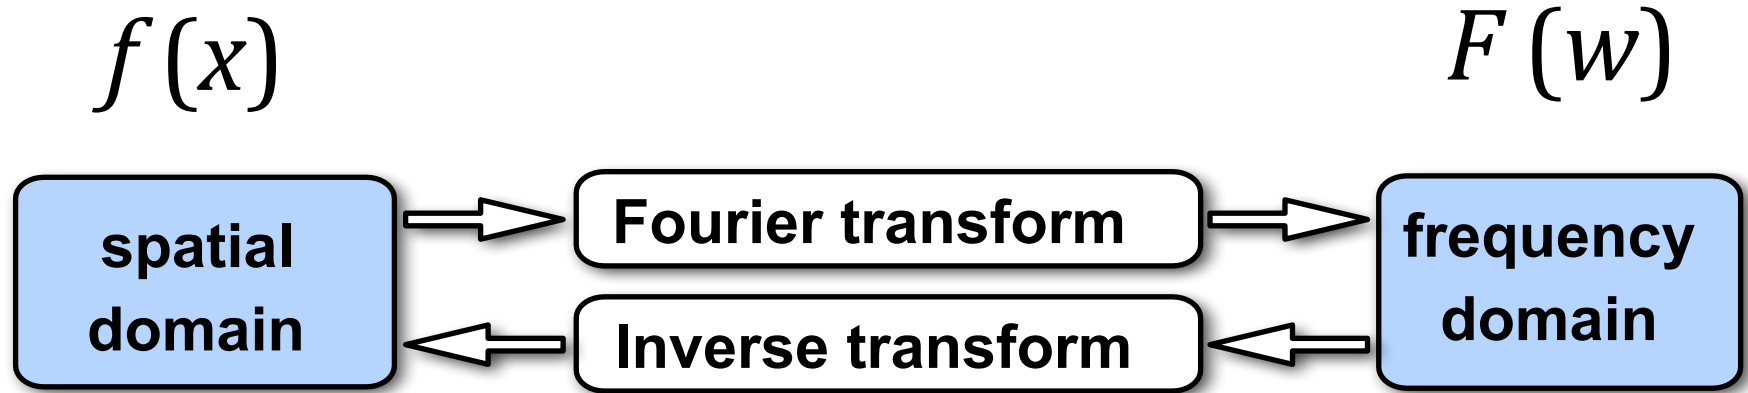

Higher Frequencies Need Faster Sampling

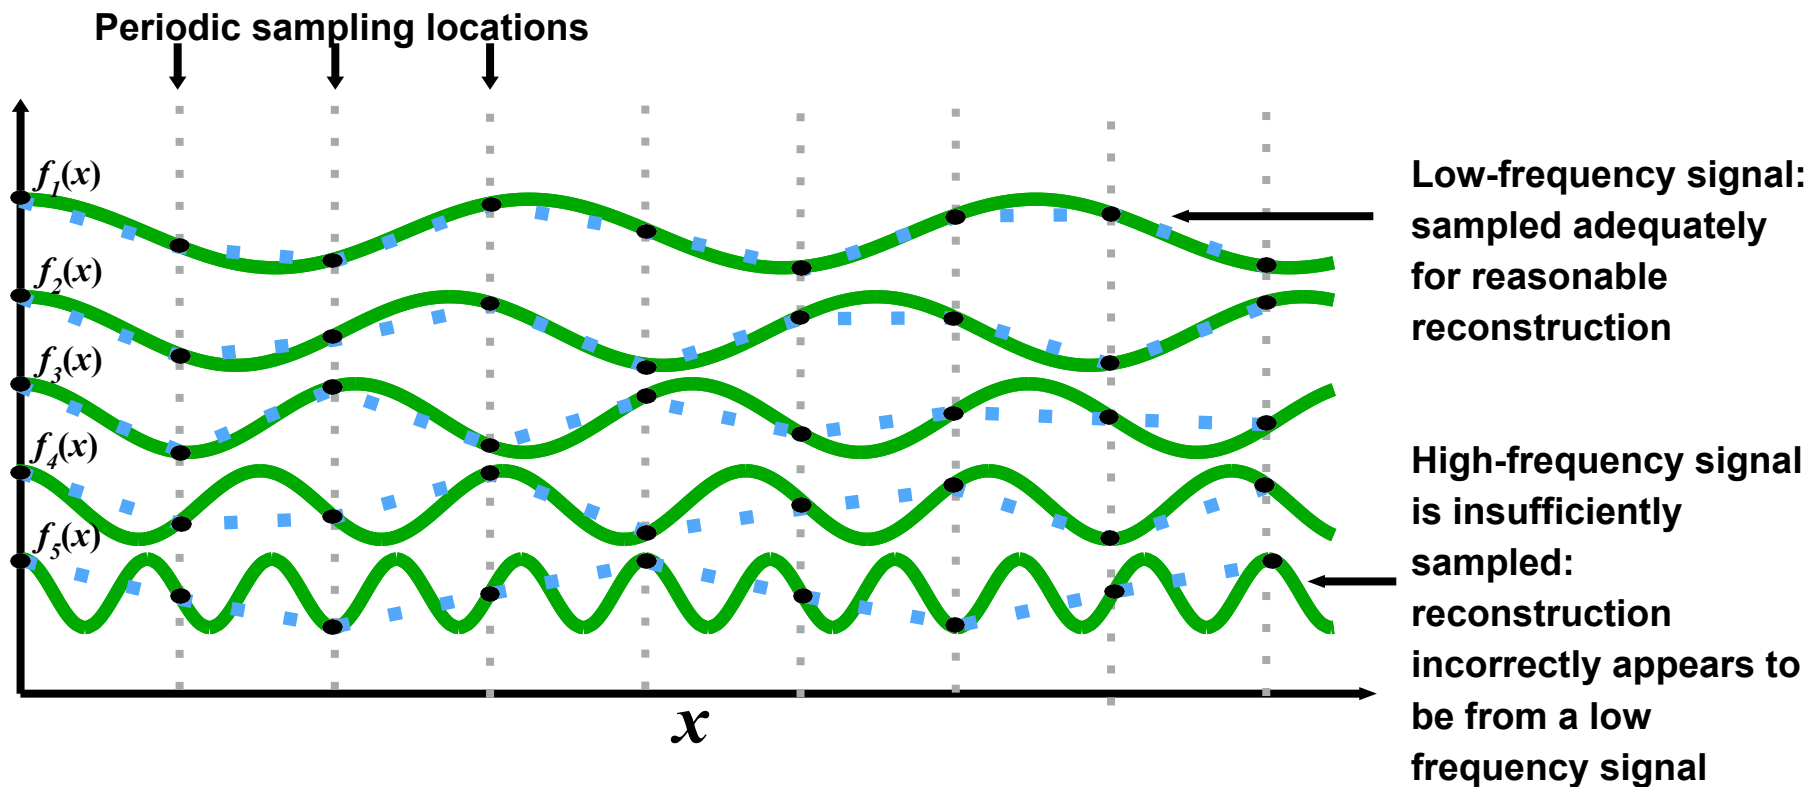

Undersampling Creates Frequency Aliases

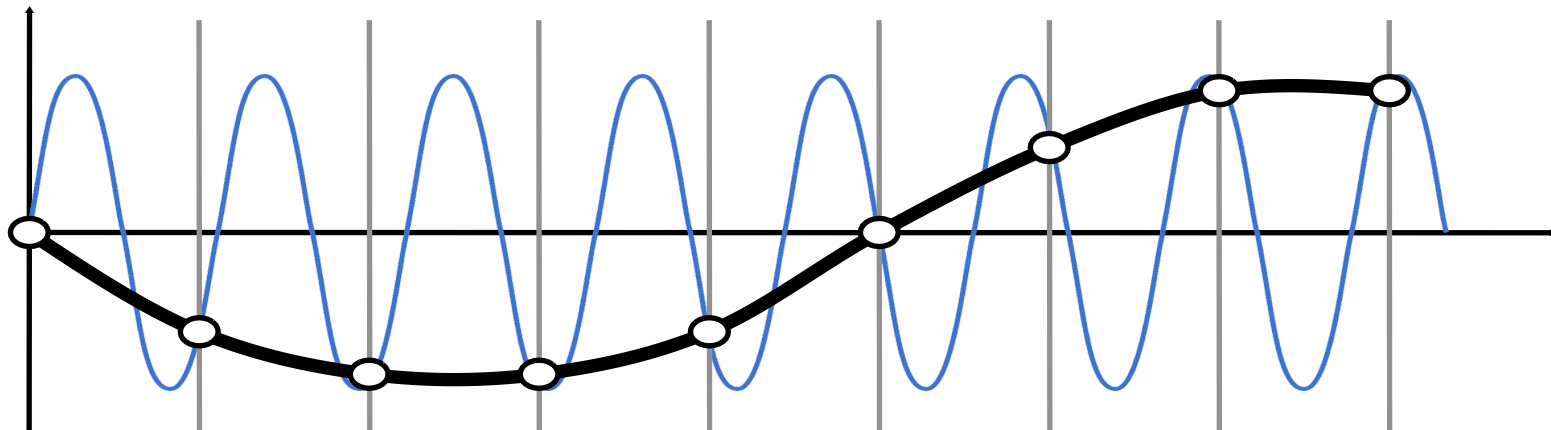

High-frequency signal is insufficiently sampled: samples erroneously appear to be from a low-frequency signal

Two frequencies that are indistinguishable at a given sampling rate are called “aliases”


“Alias” = False Identity



“Batman” = Bruce Wayne’s alias to hide his true identity

Visualization of Frequency Space

2D Frequency Space

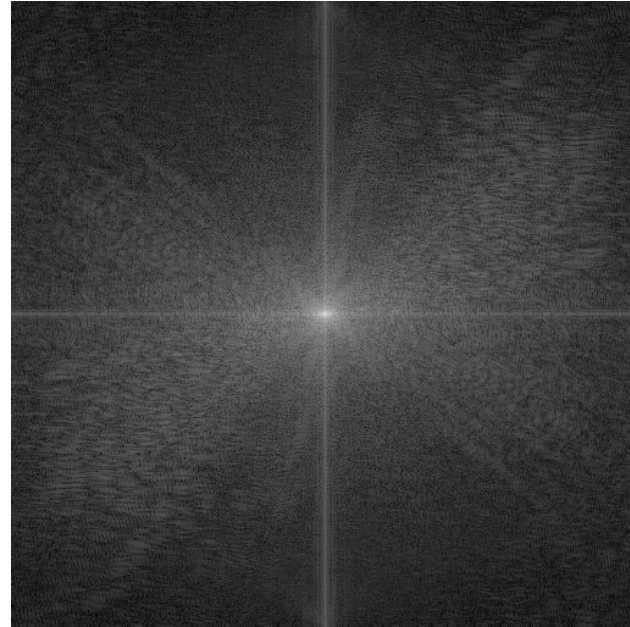


Spatial Domain**Frequency Domain**

Note: Frequency domain also known as frequency space, Fourier domain, spectrum, ...

Constant




Spatial Domain

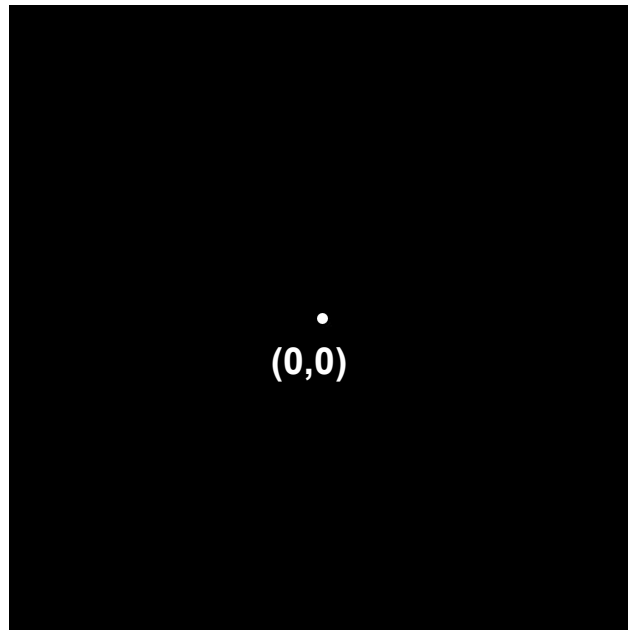


Frequency Domain

$\sin(2\pi/32)x$ frequency 1/32; 32 pixels per cycle

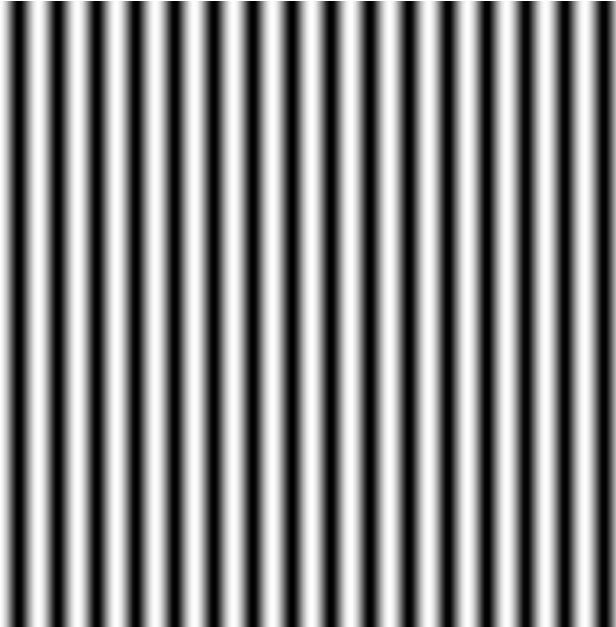


Spatial Domain

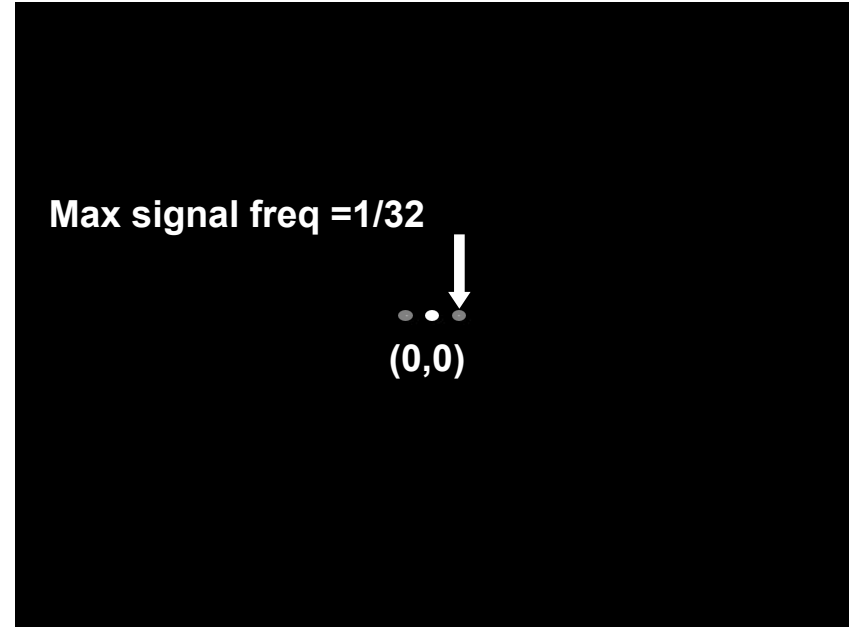


Frequency Domain

$\sin(2\pi/16)x$ — frequency 1/16; 16 pixels per cycle

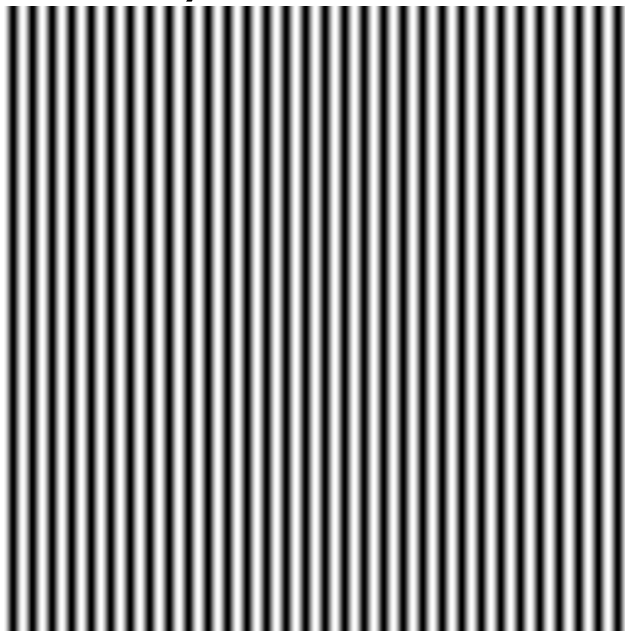


Spatial Domain

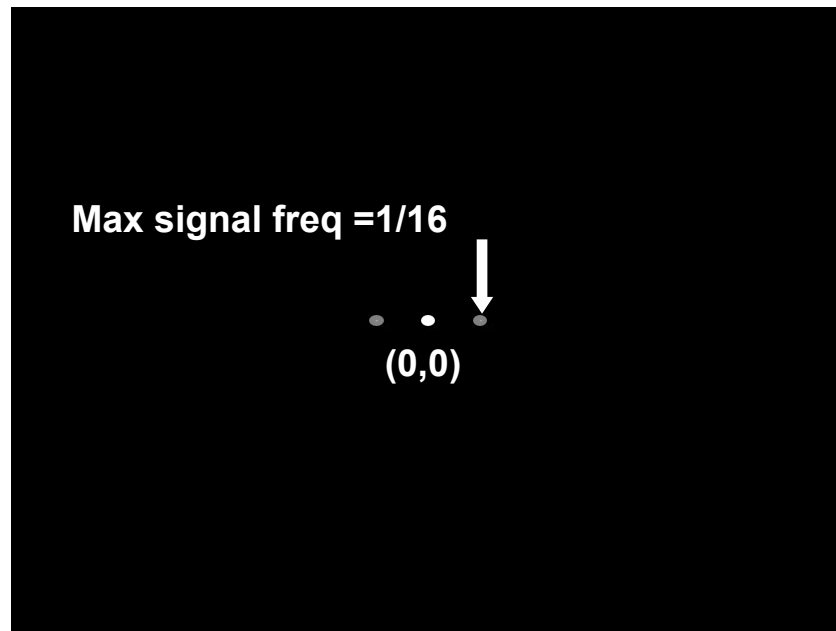


Frequency Domain

$$\sin(2\pi/16)y$$




Spatial Domain




Frequency Domain

$$\sin(2\pi/32)x \rightarrow \sin(2\pi/16)y$$

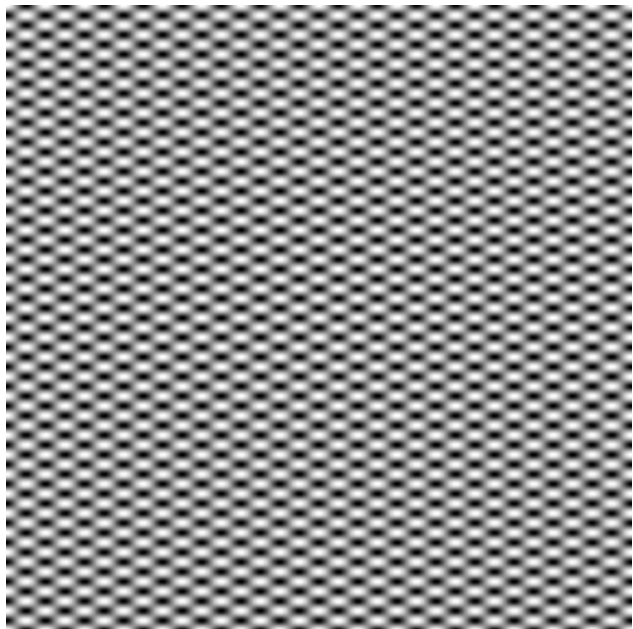


Spatial Domain




Frequency Domain

$$\exp(-r^2/16^2)$$

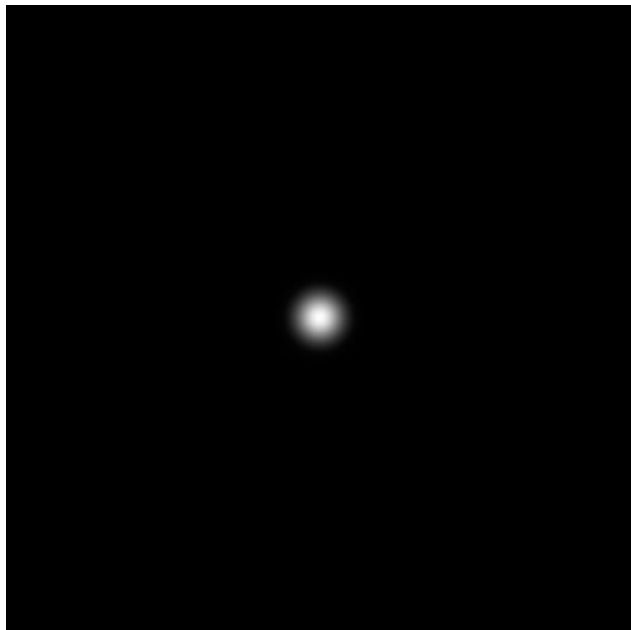


Spatial Domain

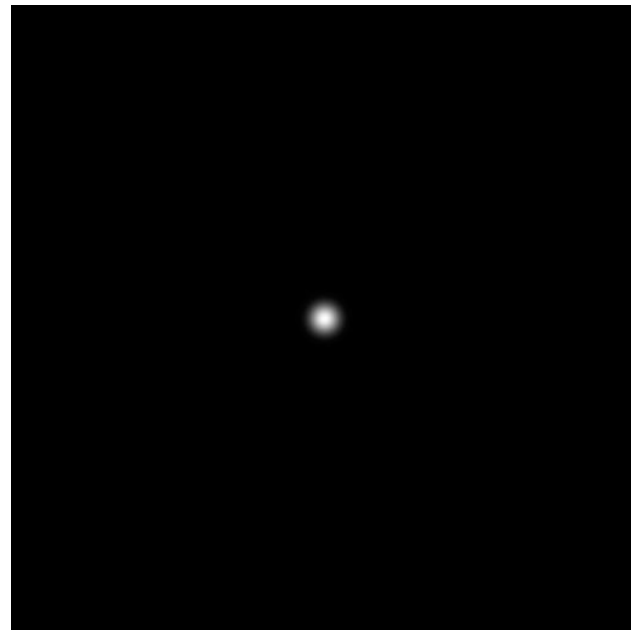


Frequency Domain

$$\exp(-r^2/32^2)$$

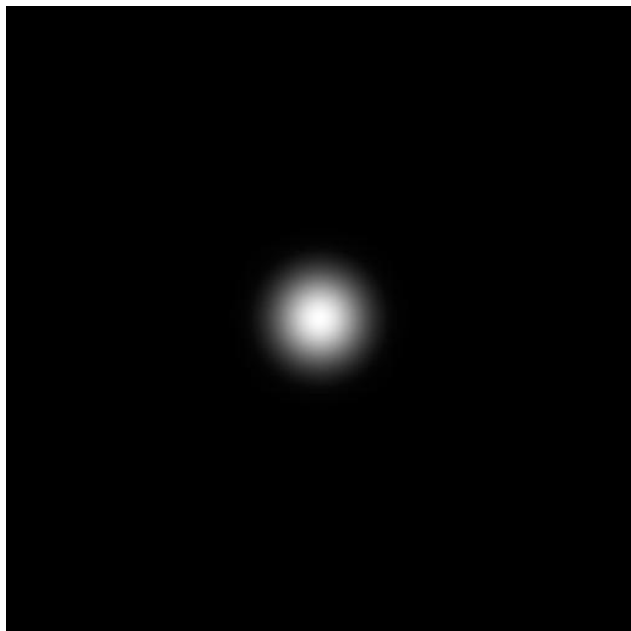


Spatial Domain

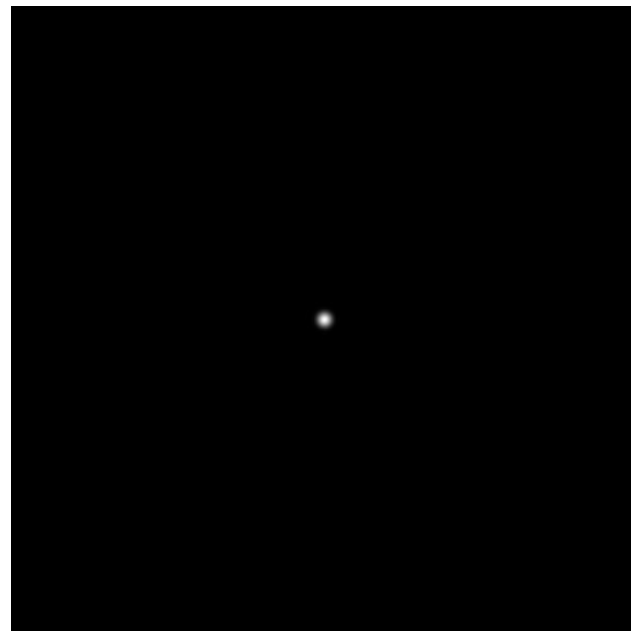


Frequency Domain

$$\exp(-x^2/32^2) \times \exp(-y^2/16^2)$$

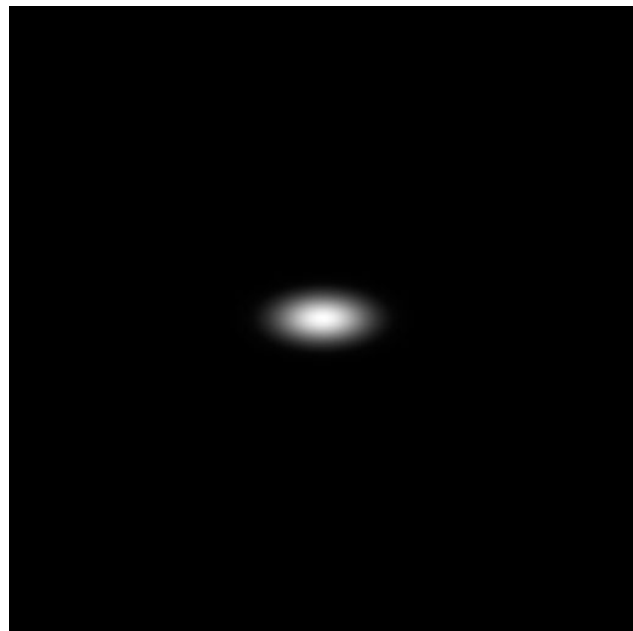


Spatial Domain

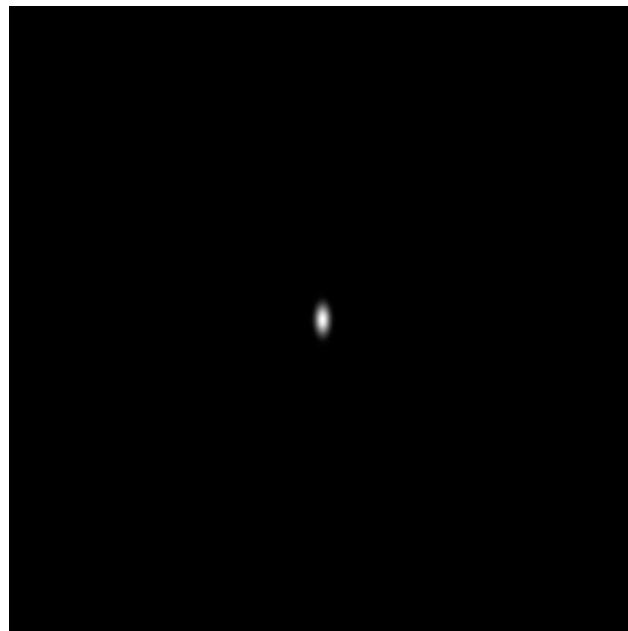

Frequency Domain

Rotate 45

$$\exp(-x^2/32^2) \times \exp(-y^2/16^2)$$

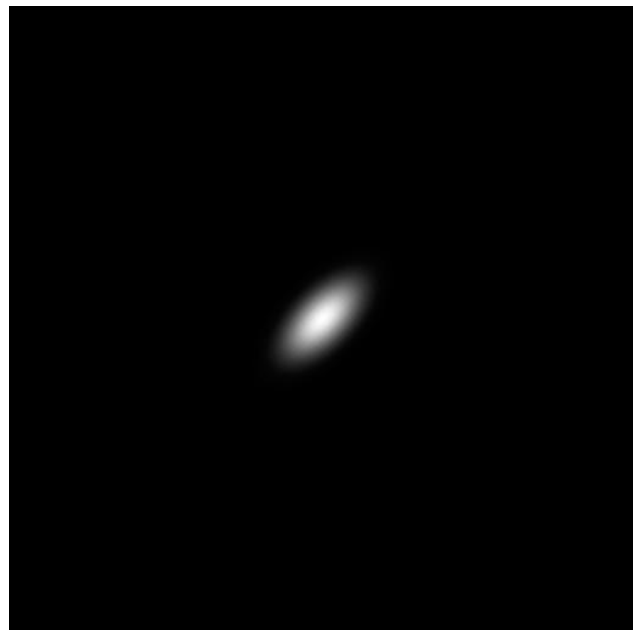

Spatial Domain




Frequency Domain

Filtering

Visualizing Image Frequency Content




Spatial Domain

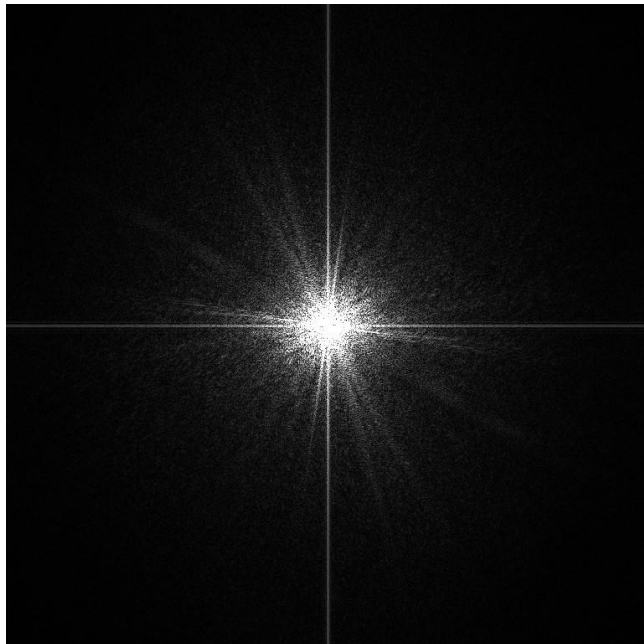


Frequency Domain

Filter Out Low Frequencies Only (Edges)

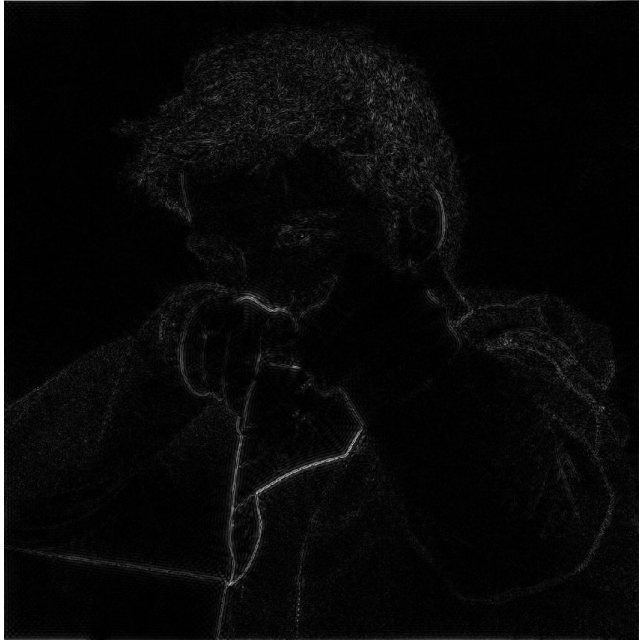

Spatial Domain

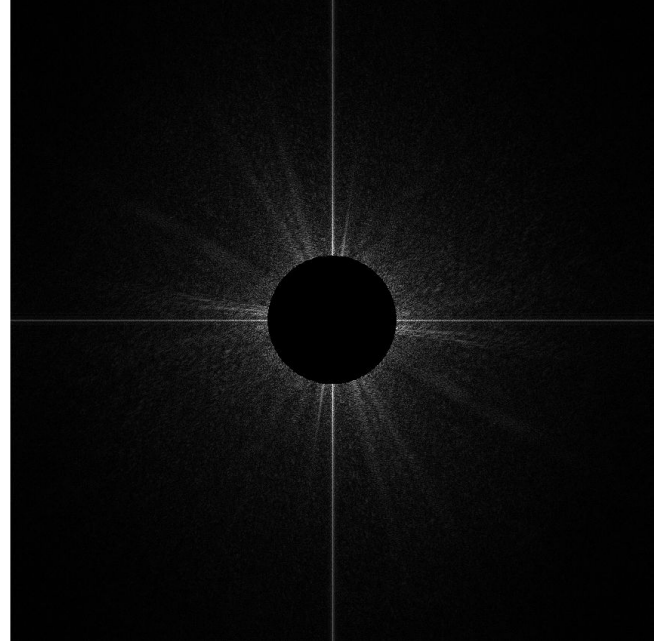


Frequency Domain

Filter Out High Frequencies (Blur)



Spatial Domain




Frequency Domain

Filter Out Low and High Frequencies



Spatial Domain

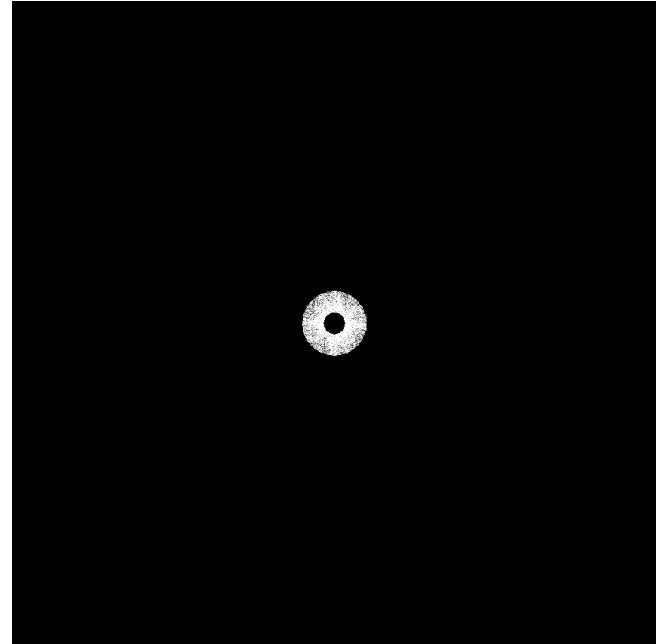


Frequency Domain

Filter Out Low and High Frequencies



Spatial Domain

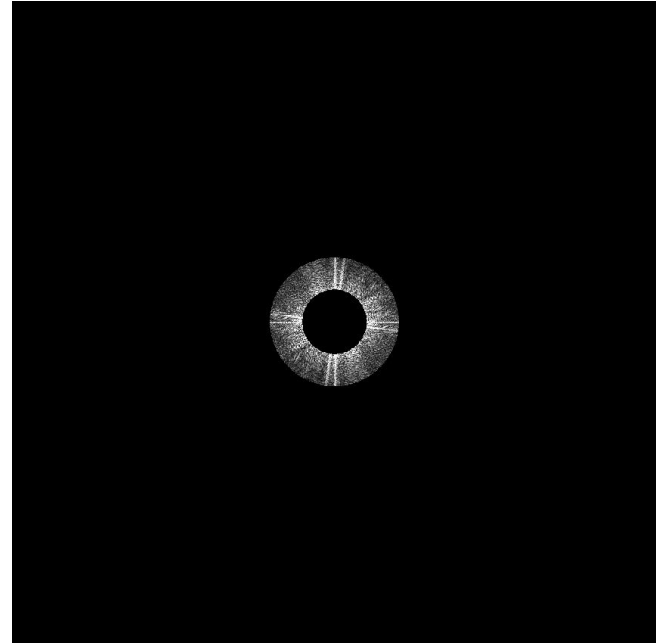

Frequency Domain

Filtering = Convolution

Convolution Theorem


Convolution in the spatial domain is equal to multiplication in the frequency domain, and vice versa

- **Option 1:**
 - **Filter by convolution in the spatial domain**
- **Option 2:**
 - **Transform to frequency domain (Fourier transform)**
 - **Multiply by Fourier transform of convolution kernel**
 - **Transform back to spatial domain (inverse Fourier)**

Convolution Theorem

**Spatial
Domain**





=



**Fourier
Transform**




**Inv. Fourier
Transform**




**Frequency
Domain**



x



=



Convolution

Signal

1	3	5	3	7	1	3	8	6	4
---	---	---	---	---	---	---	---	---	---

Filter

1	2	1
---	---	---

Convolution

Signal

1	3	5	3	7	1	3	8	6	4
---	---	---	---	---	---	---	---	---	---

Filter

1	2	1
---	---	---

$$1x_1 + 3x_2 + 5x_3 = 12$$

Result

12

Convolution

Signal

1	3	5	3	7	1	3	8	6	4
---	---	---	---	---	---	---	---	---	---

Filter

1	2	1
---	---	---

$$3 \times 1 + 5 \times 2 + 3 \times 1 = 16$$

Result

12	16								
----	----	--	--	--	--	--	--	--	--

Convolution

Signal

1	3	5	3	7	1	3	8	6	4
---	---	---	---	---	---	---	---	---	---

Filter

1	2	1
---	---	---

$$5 \times 1 + 3 \times 2 + 7 \times 1 = 18$$

Result

12	16	18							
----	----	----	--	--	--	--	--	--	--


Box Filter

$$\frac{1}{9}$$


1	1	1
1	1	1
1	1	1

Example: 3x3 box filter

Box Function = “Low Pass” Filter




Spatial Domain

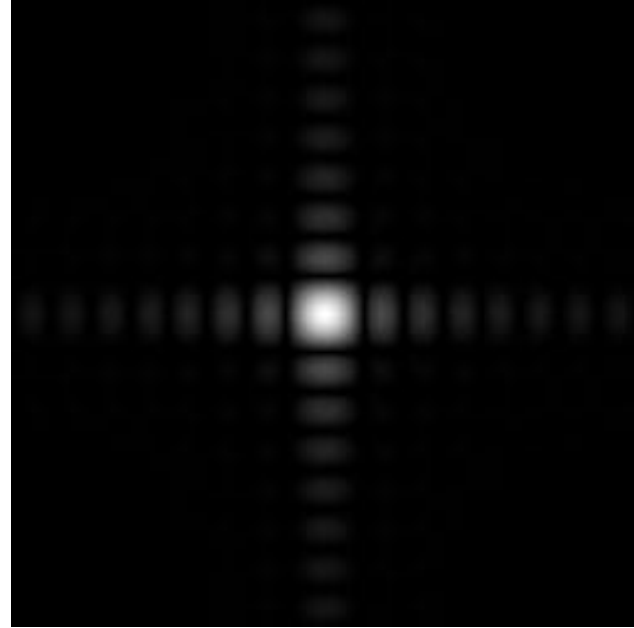


Frequency Domain

Wider Filter Kernel = Lower Frequencies

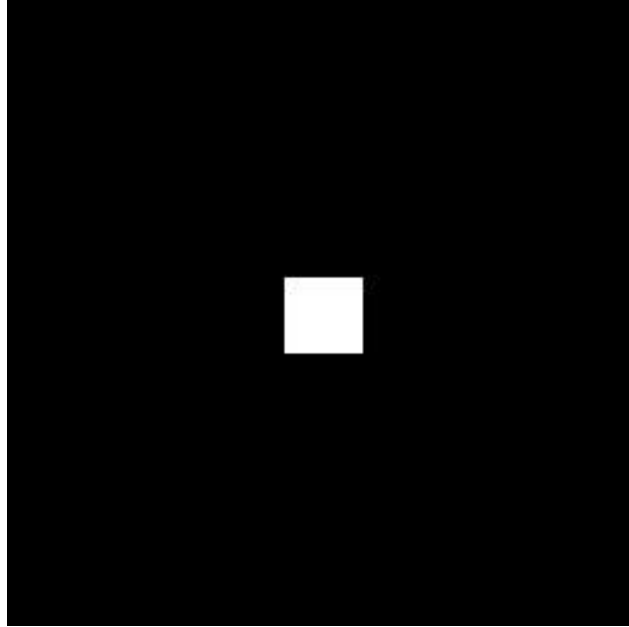

Spatial Domain

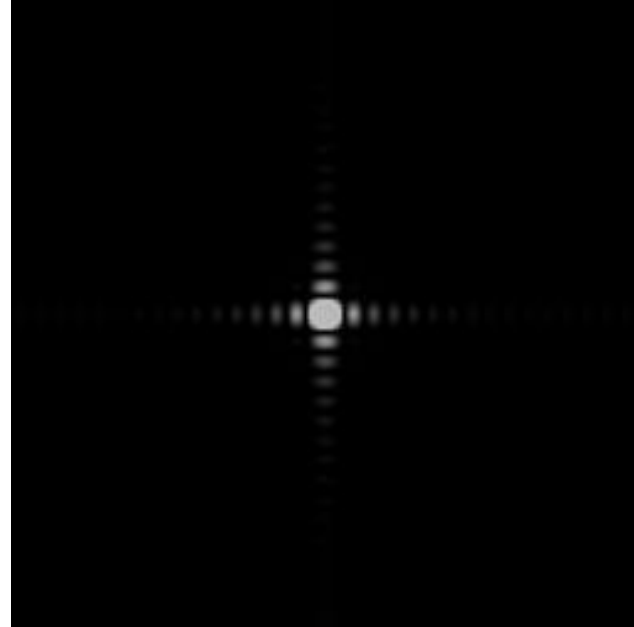

Frequency Domain

Wider Filter Kernel = Lower Frequencies

As a filter is localized in the spatial domain, it spreads out in frequency domain.

Conversely, as a filter is localized in frequency domain, it spreads out in the spatial domain

Efficiency

When is it faster to implement a filter by convolution in the spatial domain?

When is it faster to implement a filter by multiplication in the frequency domain?

Nyquist Frequency & Antialiasing

Nyquist Theorem

Theorem: We get no aliasing from frequencies in the signal that are less than the Nyquist frequency (which is defined as half the sampling frequency) *


* Based on Shannon sampling theorem

Example: if a signal is sampled at 100 Hz, the Nyquist frequency is 50 Hz.

Image Frequency: Visual Example



Spatial Domain

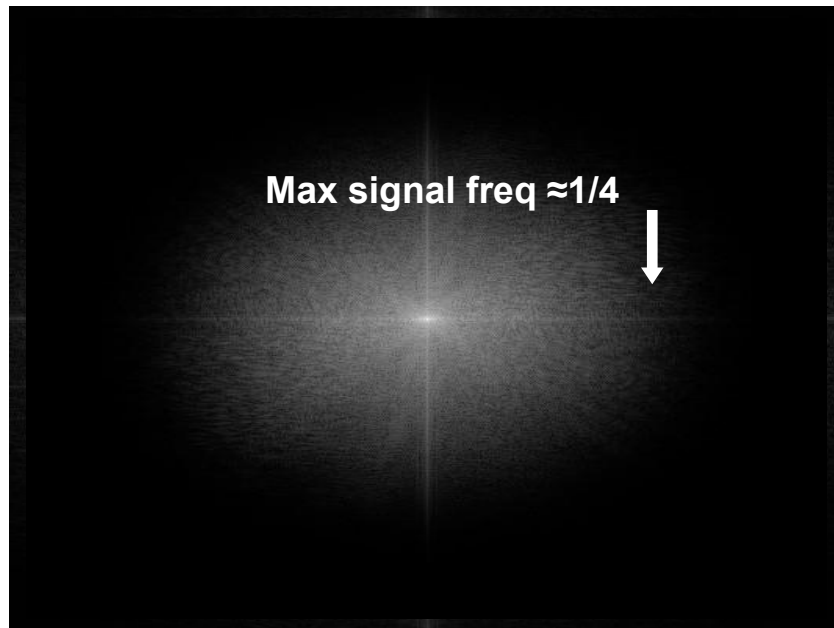


Frequency Domain

Image Frequency: Visual Example



Spatial Domain

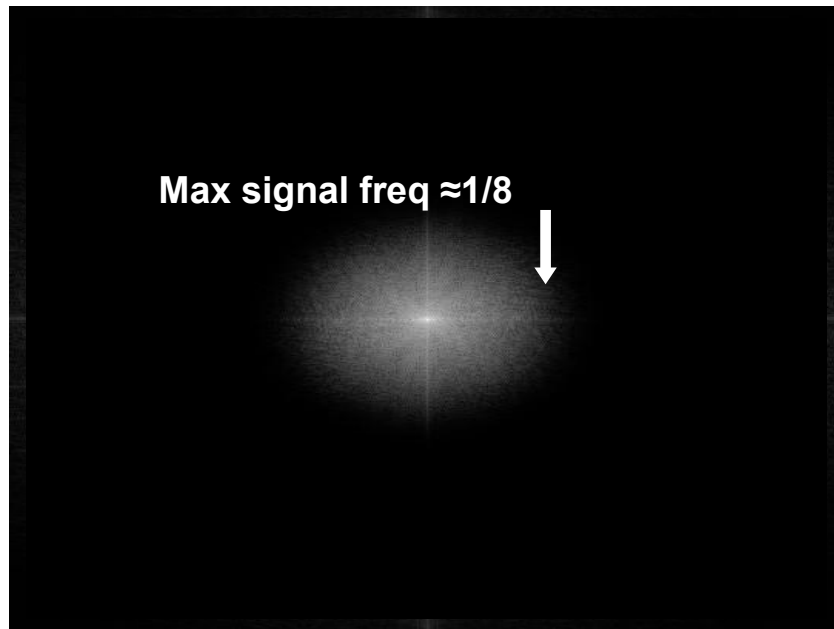


Frequency Domain

Image Frequency: Visual Example




Spatial Domain

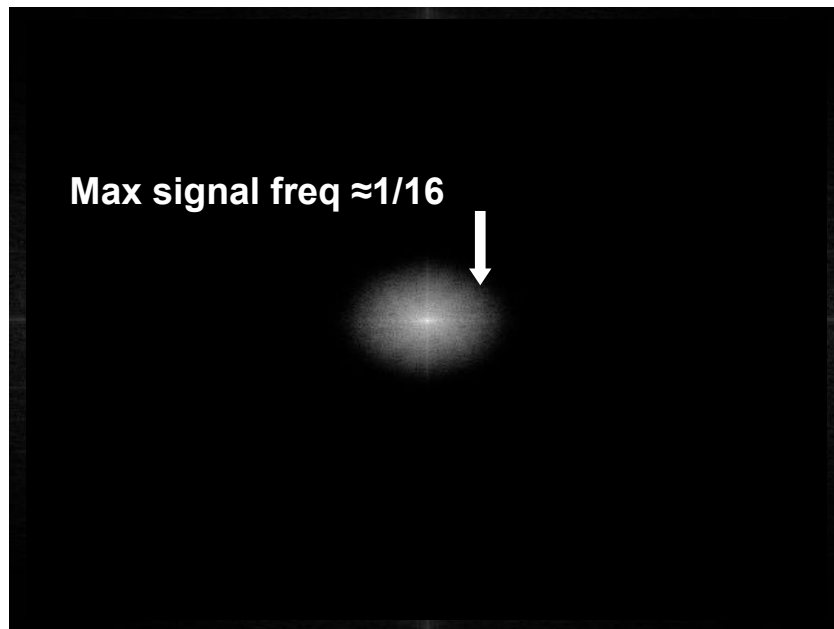


Frequency Domain

Image Frequency: Visual Example

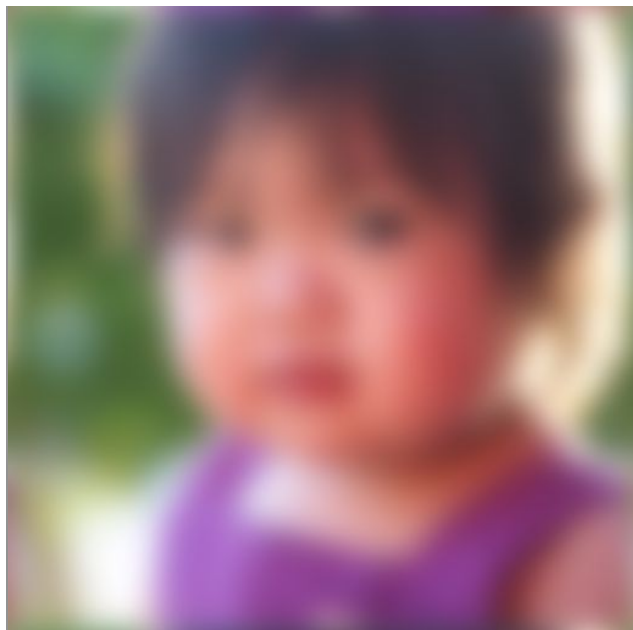

Spatial Domain

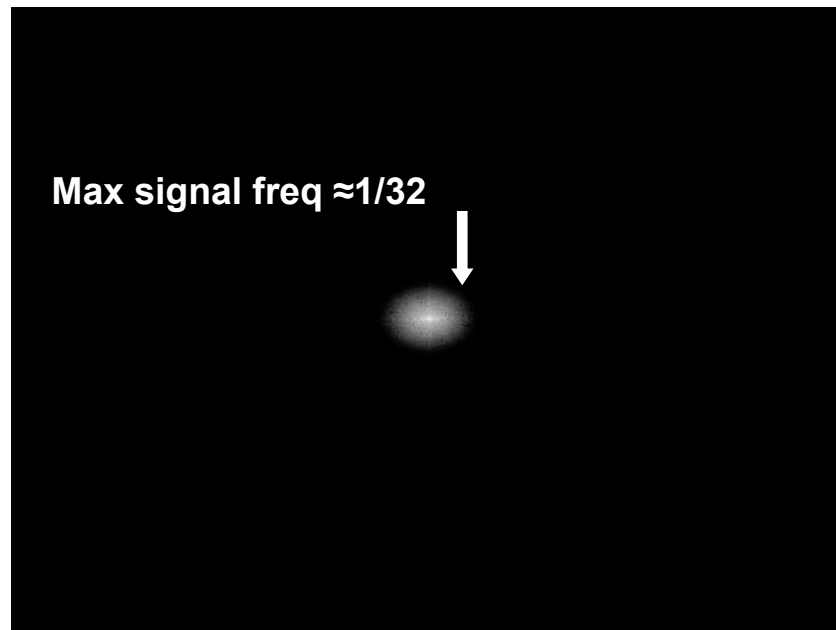


Frequency Domain

Image Frequency: Visual Example



Spatial Domain

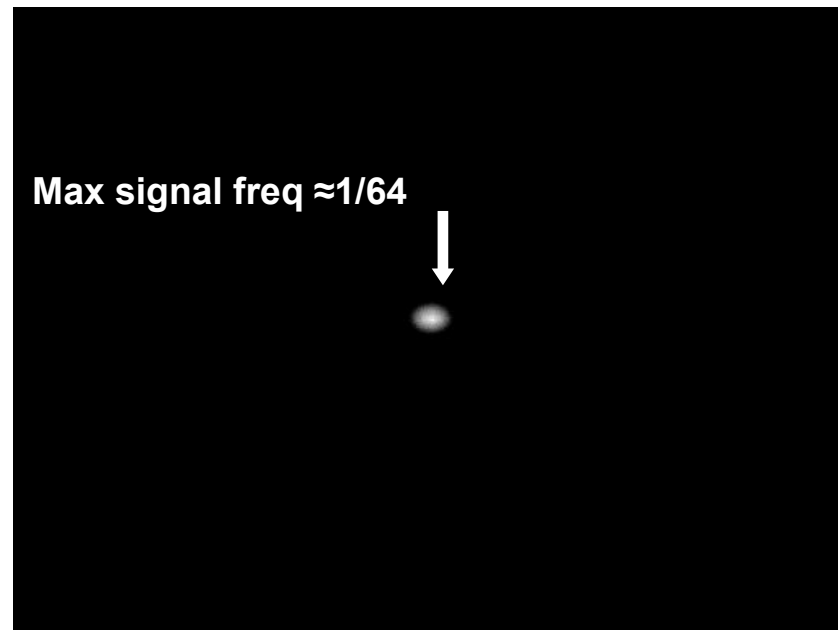


Frequency Domain

Nyquist Frequency: Visual Example


In next sequence:

- Visualize sampling an image every 16 pixels
- Visualize when image is blurred enough that image frequencies match Nyquist frequency (no aliasing)

Signal vs Nyquist Frequency: Example

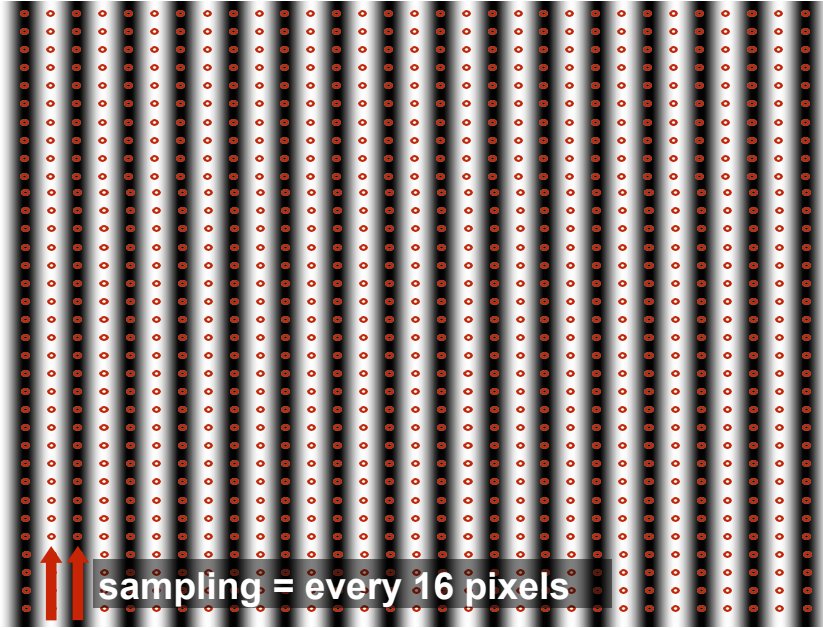


Spatial Domain

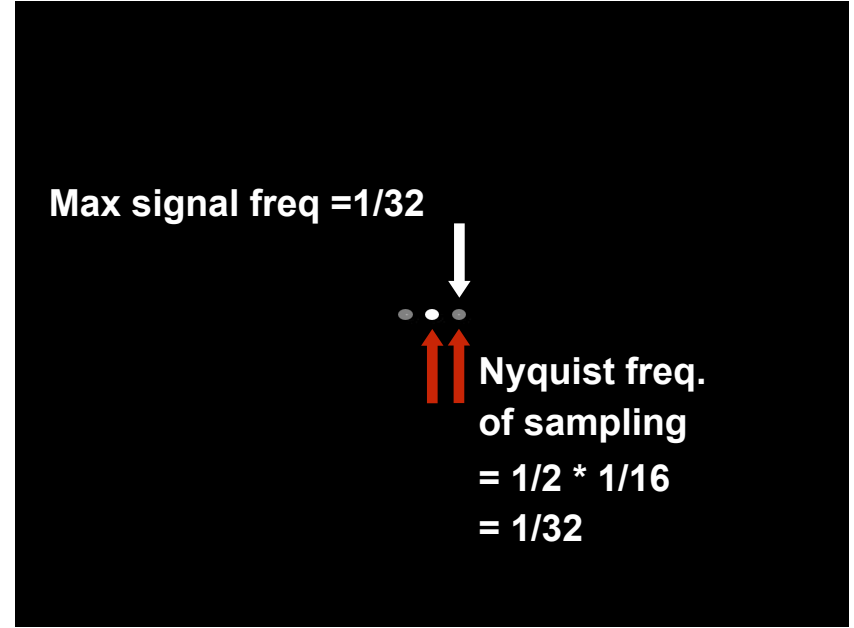


Frequency Domain

No Aliasing!

Signal vs Nyquist Frequency: Example

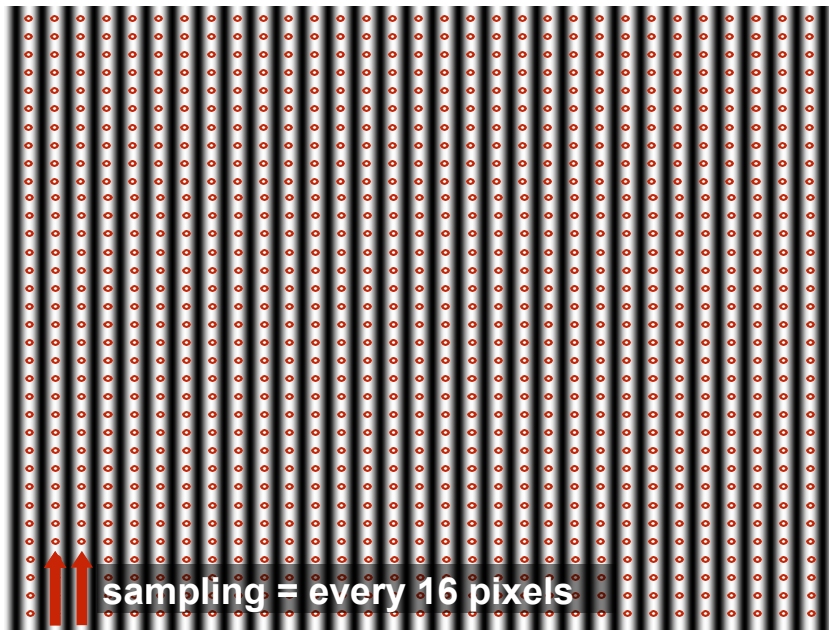


Spatial Domain

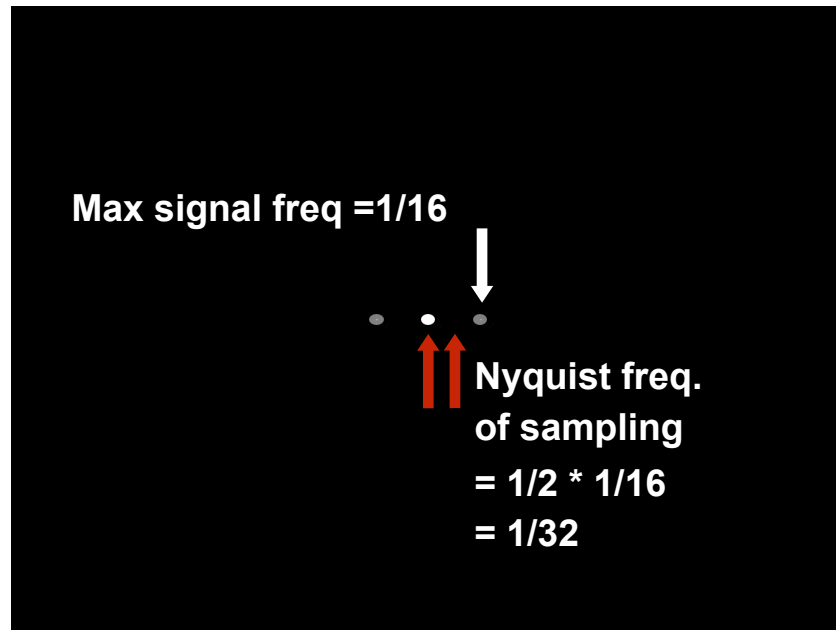


Frequency Domain

Aliasing!

Signal vs Nyquist Frequency: Example

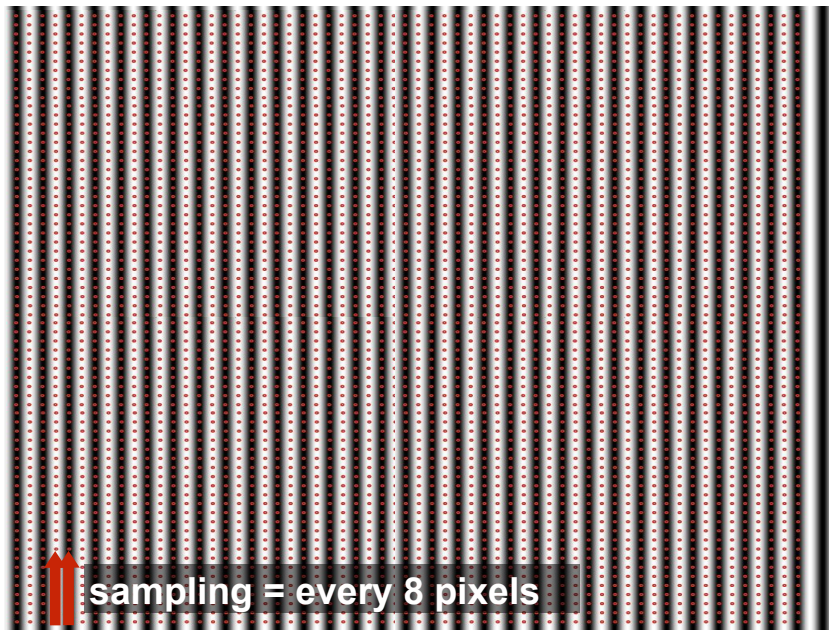

Spatial Domain

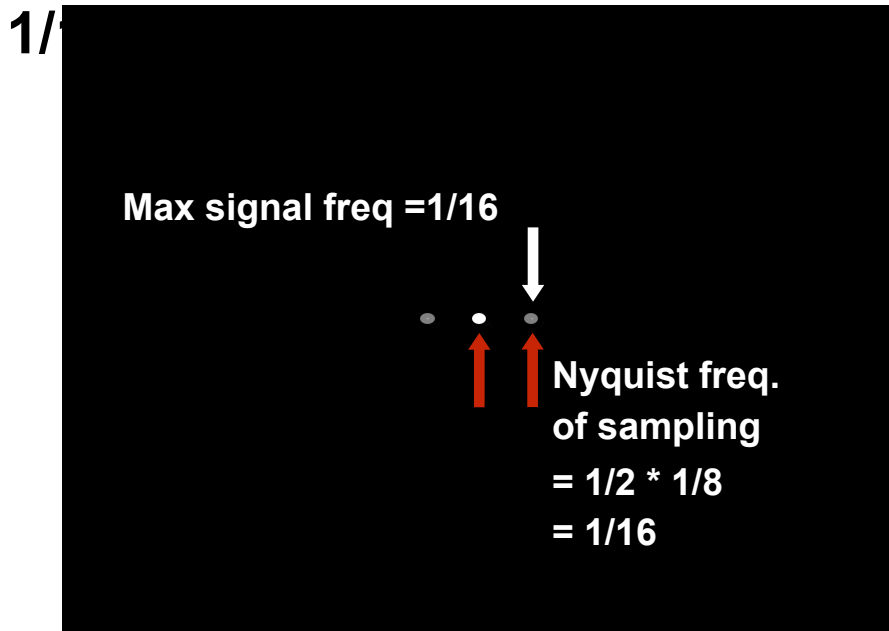

Frequency Domain

No Aliasing!

Image Frequency: Visual Example


In the following image sequence:

- Image is 512x512 pixels
- We will progressively blur the image, see how the frequency spectrum shrinks, and see what the maximum frequency is

Nyquist Frequency: Visual Example




Spatial Domain

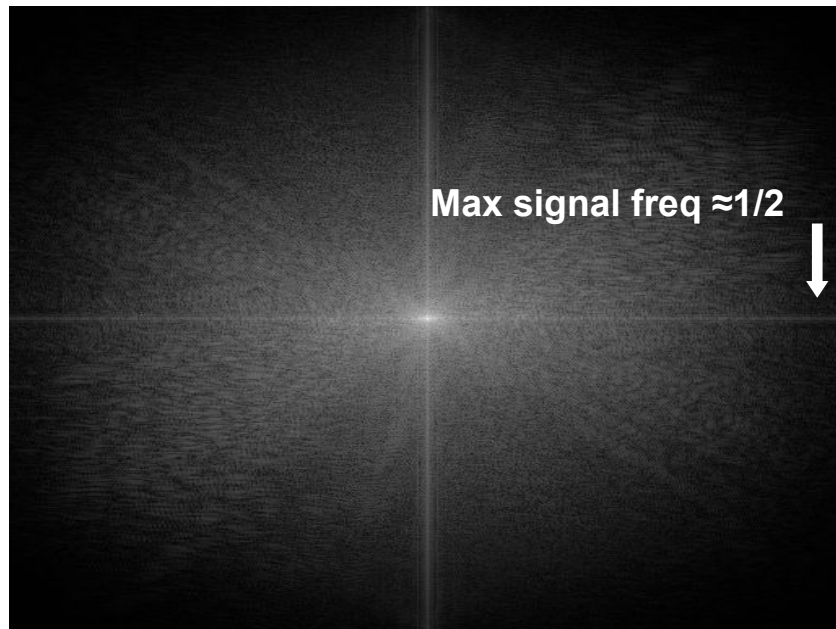


Frequency Domain

Nyquist Frequency: Visual Example

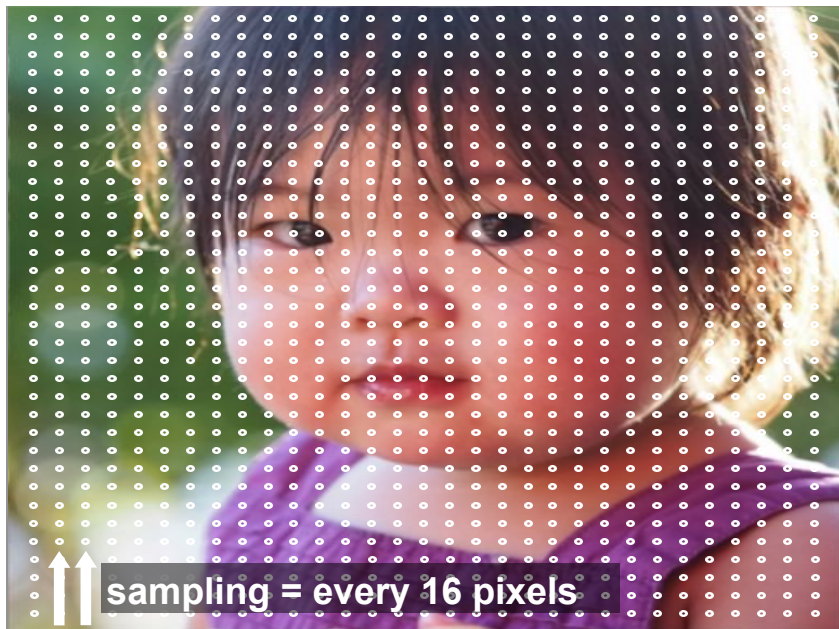


Spatial Domain

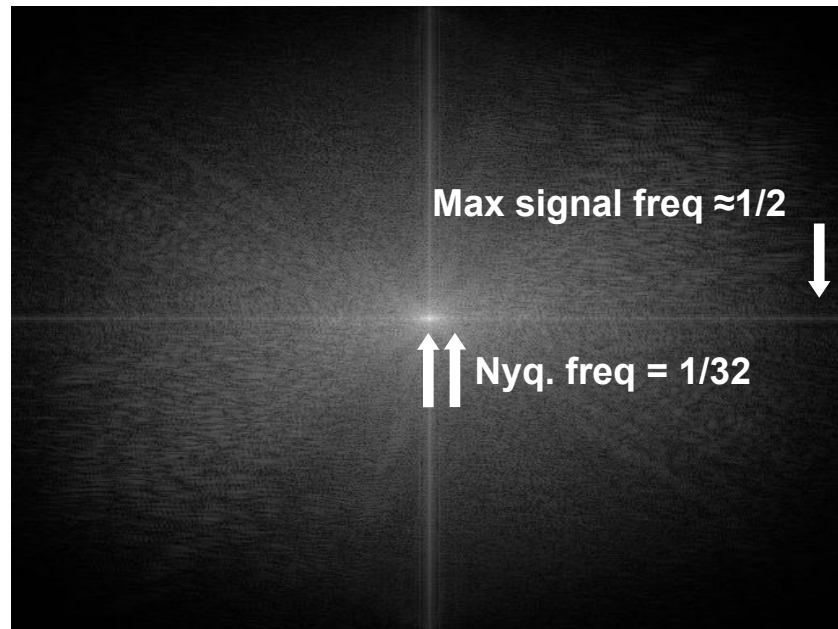


Frequency Domain



Nyquist Frequency: Visual Example

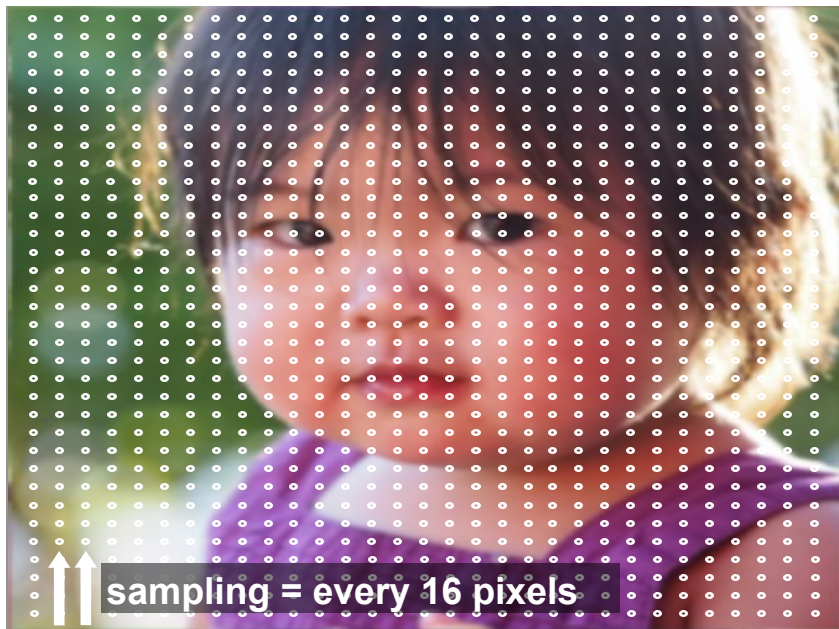

Spatial Domain

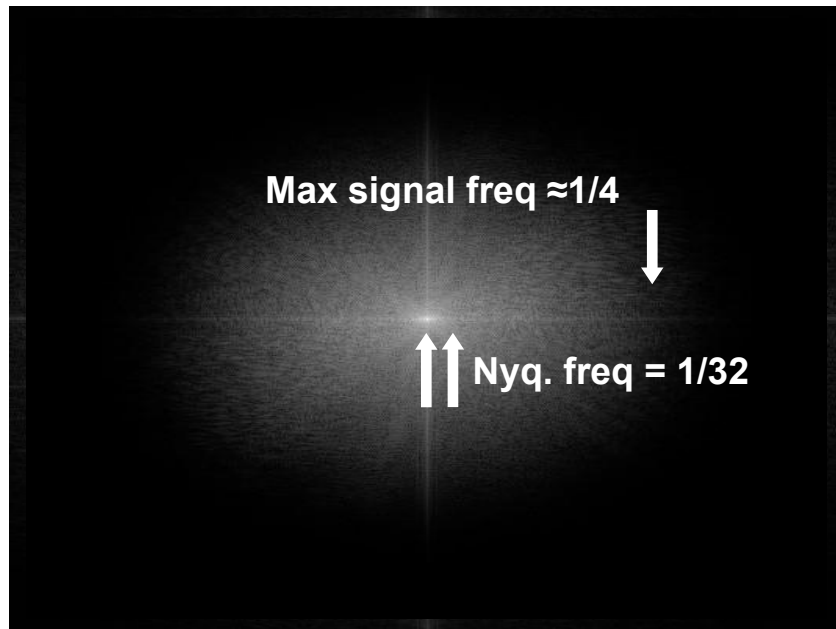


Frequency Domain



Nyquist Frequency: Visual Example



Spatial Domain

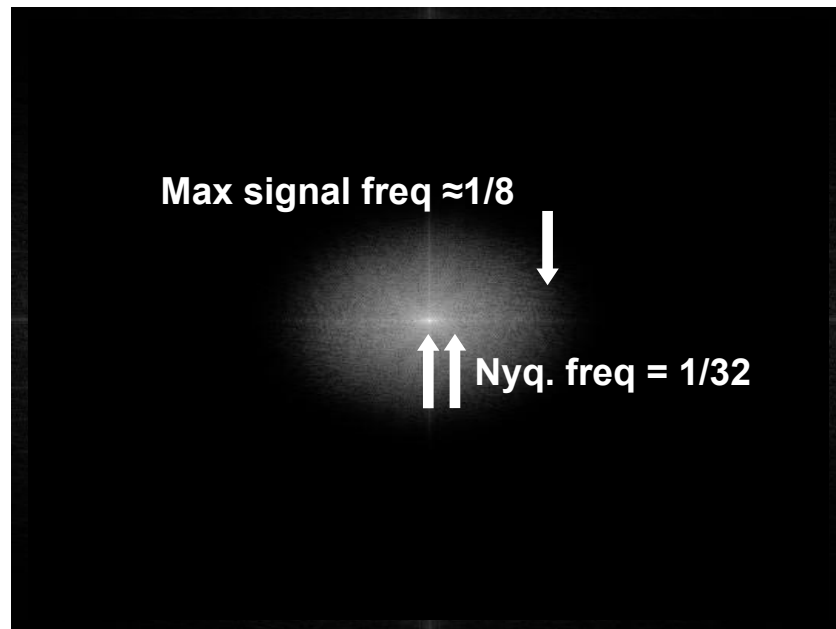


Frequency Domain




Nyquist Frequency: Visual Example



Spatial Domain

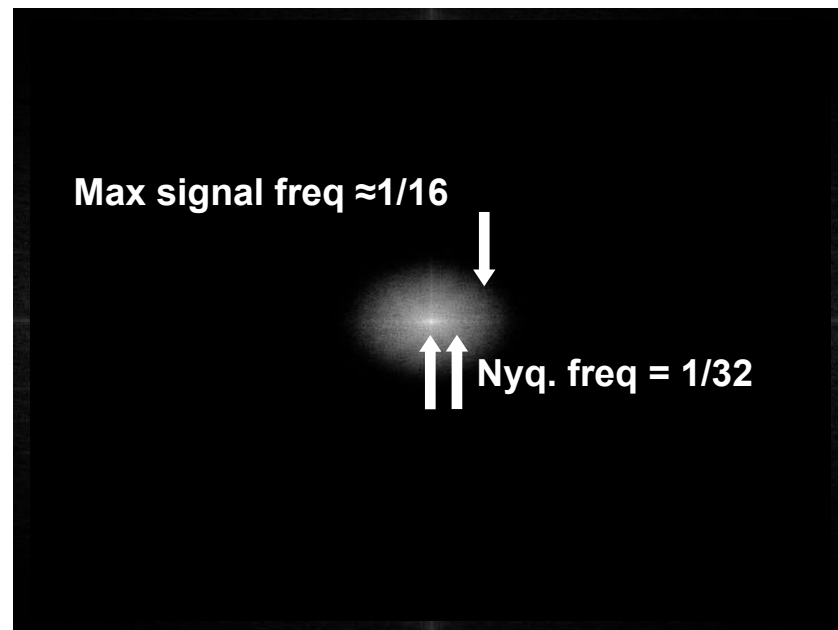


Frequency Domain




Nyquist Frequency: Visual Example




Spatial Domain

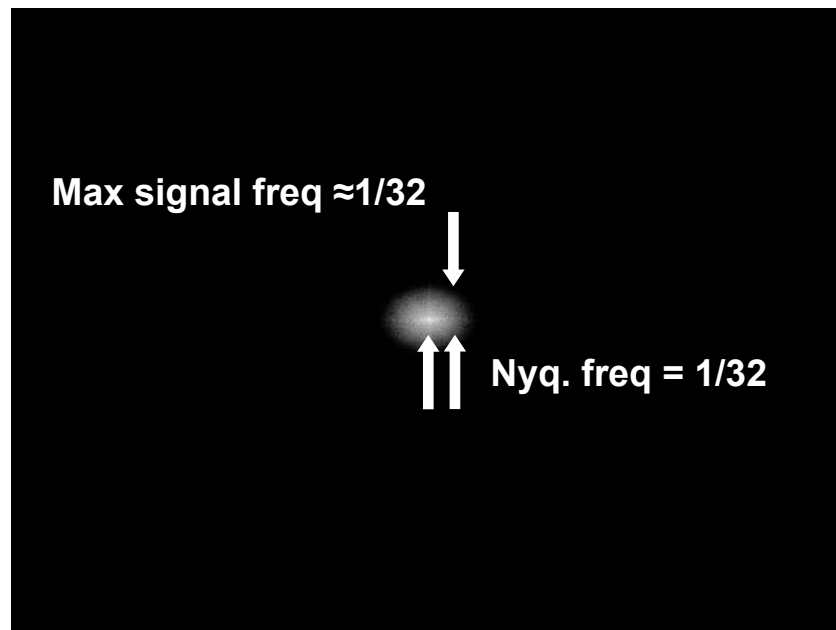


Frequency Domain




Nyquist Frequency: Visual Example

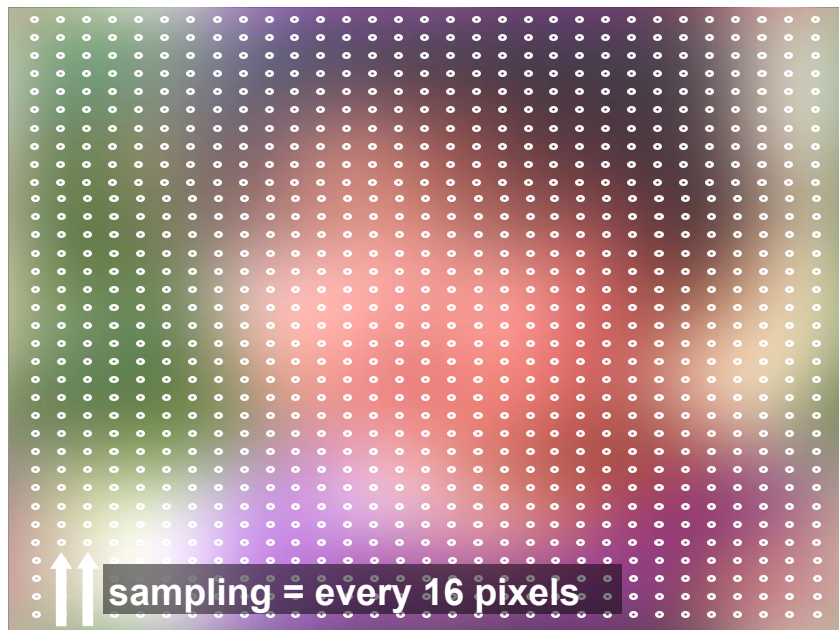

Spatial Domain

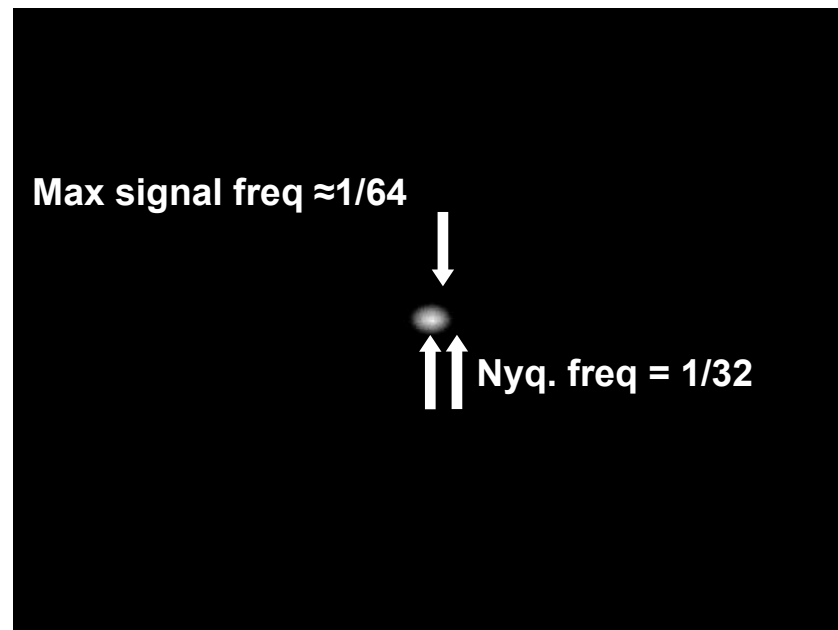

Frequency Domain



Nyquist Frequency: Visual Example

Recap:

- Filter (blur) original image to reduce maximum signal frequency
- Create low-resolution image by sampling only every 16 pixels
- (Sampling frequency is $1/16$, and Nyquist frequency is $1/32$)

Less blur

More blur



Nyquist

Aliasing

Which do you prefer?

Overblurring

Nyquist Frequency: Visual Example

Recap:

- Filter (blur) original image to reduce maximum signal frequency
- Create low-resolution image by sampling only every 16 pixels
- (Sampling frequency is $1/16$, and Nyquist frequency is $1/32$)



Aliasing and over blurring can be objectionable even at small image sizes

Antialiasing

How Can We Reduce Aliasing Error?

Increase sampling rate (increase Nyquist frequency)


- Higher resolution displays, sensors, framebuffers...
- But: costly & may need very high resolution

Antialiasing


- Simple idea: remove (or reduce) signal frequencies above the Nyquist frequency before sampling
- How? Filter out high frequencies before sampling.

A Practical Pre-Filter

A 1 pixel-width box filter will attenuate frequencies whose period is less than or equal to 1 pixel-width



Spatial Domain

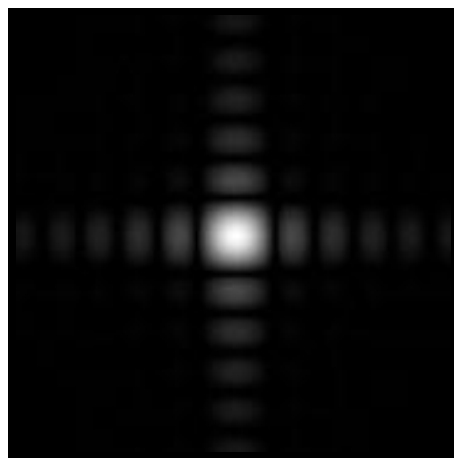

Frequency Domain


Antialiasing by Computing Average Pixel Value

In rasterizing one triangle, the average value inside a pixel area of $f(x,y) = \text{inside}(\text{triangle}, x, y)$ is equal to the area of the pixel covered by the triangle.

Original



Filtered

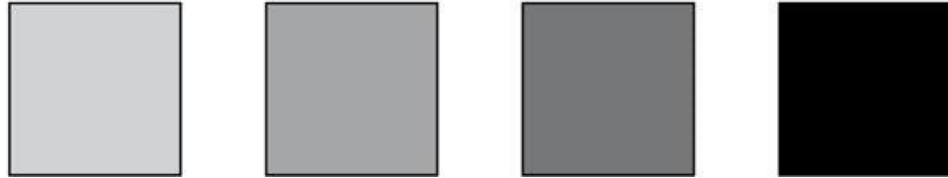


1 pixel width

Antialiasing By Supersampling


Supersampling

We can approximate the effect of the 1-pixel box filter by sampling multiple locations within a pixel and averaging their values:

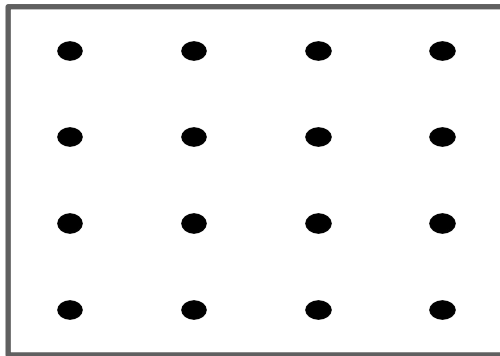


4x4 supersampling

Point Sampling: One Sample Per Pixel

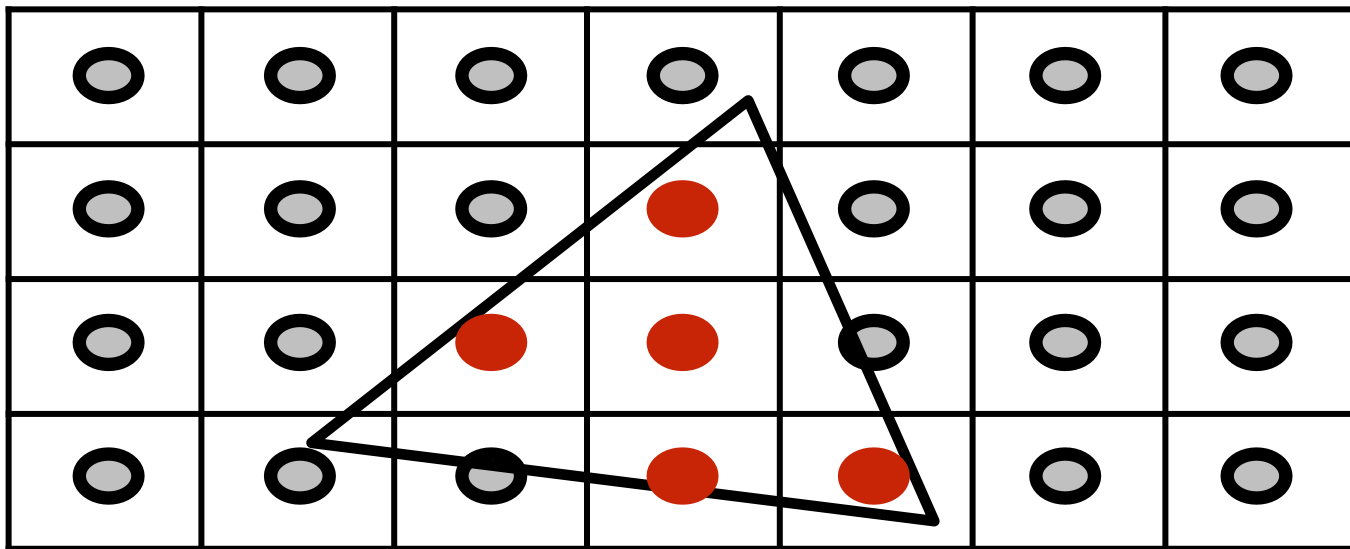

Supersampling: Step 1


Take $N \times N$ samples in each pixel.

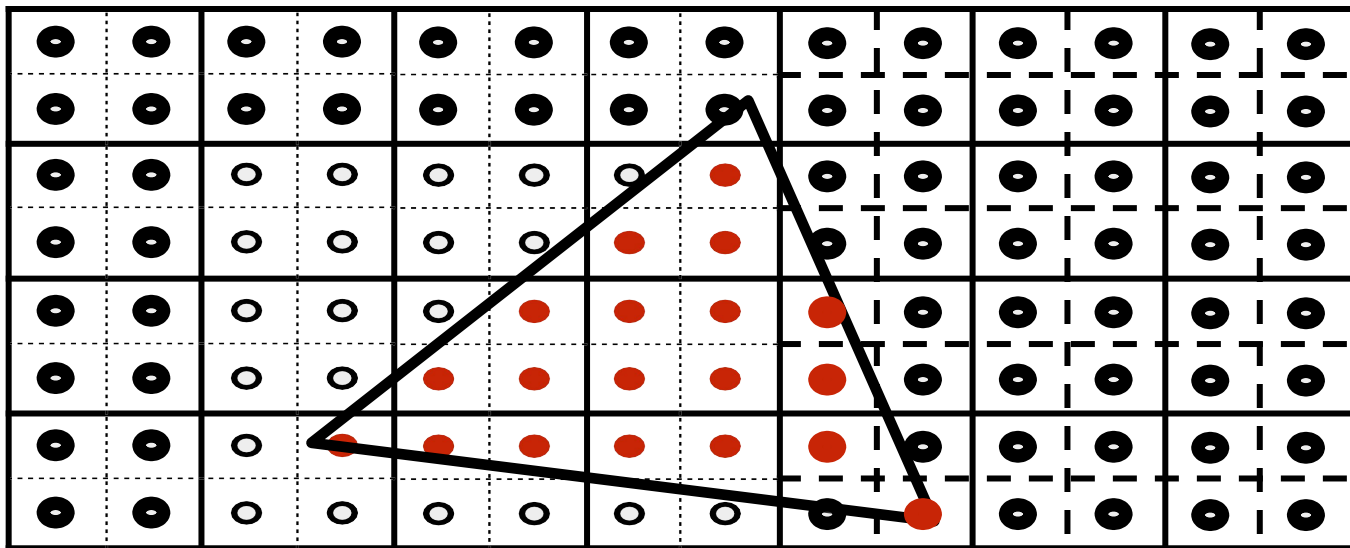

2x2 supersampling

Supersampling: Step 2


Average the $N \times N$ samples “inside” each pixel.

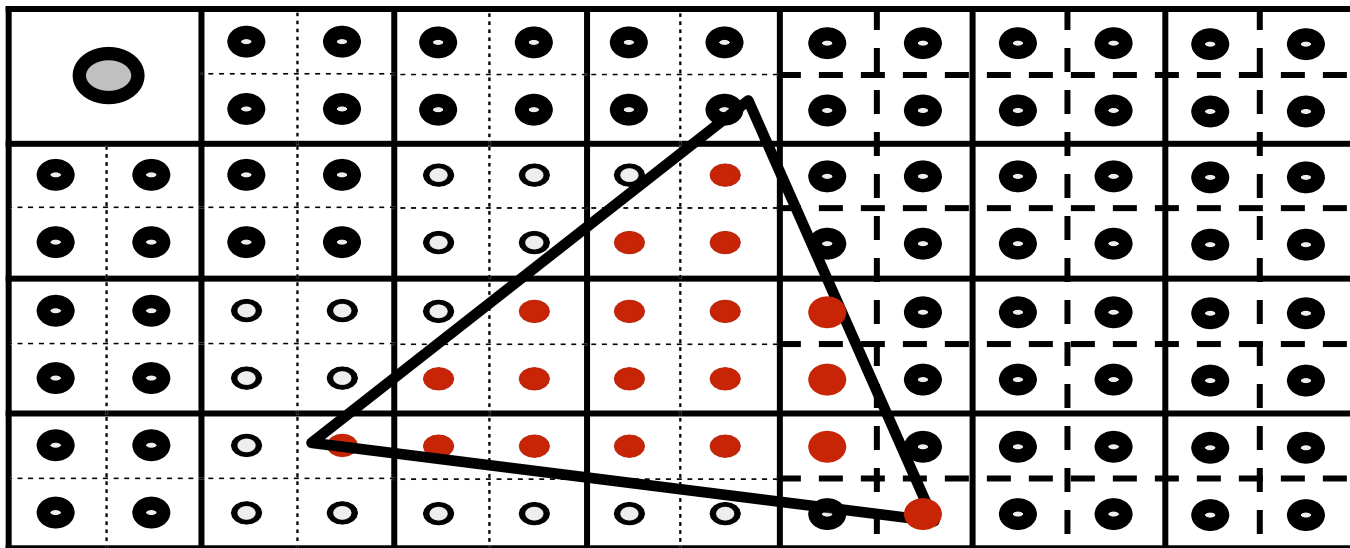

Averaging down

Supersampling: Step 2


Average the $N \times N$ samples “inside” each pixel.

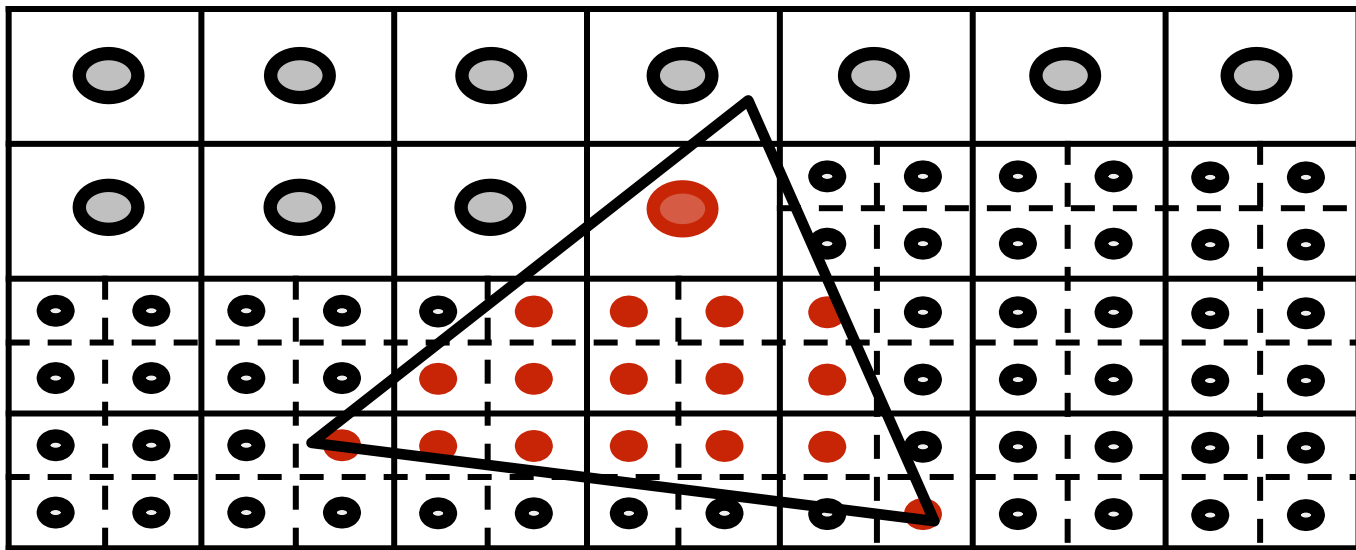

Averaging down

Supersampling: Step 2

Average the $N \times N$ samples “inside” each pixel.


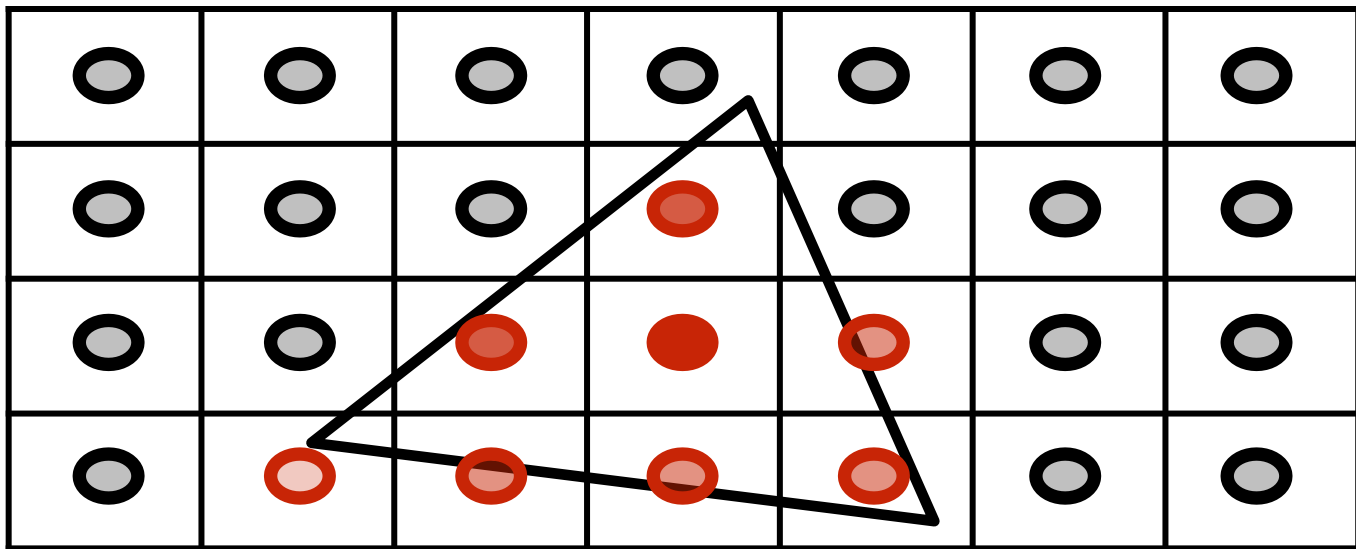


Supersampling: Result

This is the corresponding signal emitted by the display



			75%			
		75%	100%	50%		
	25%	50%	50%	50%		

Point Sampling

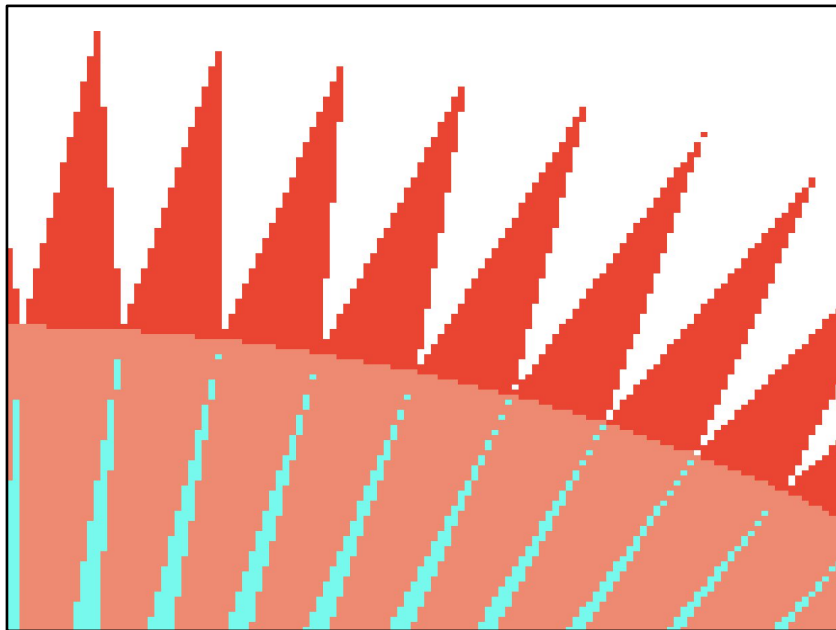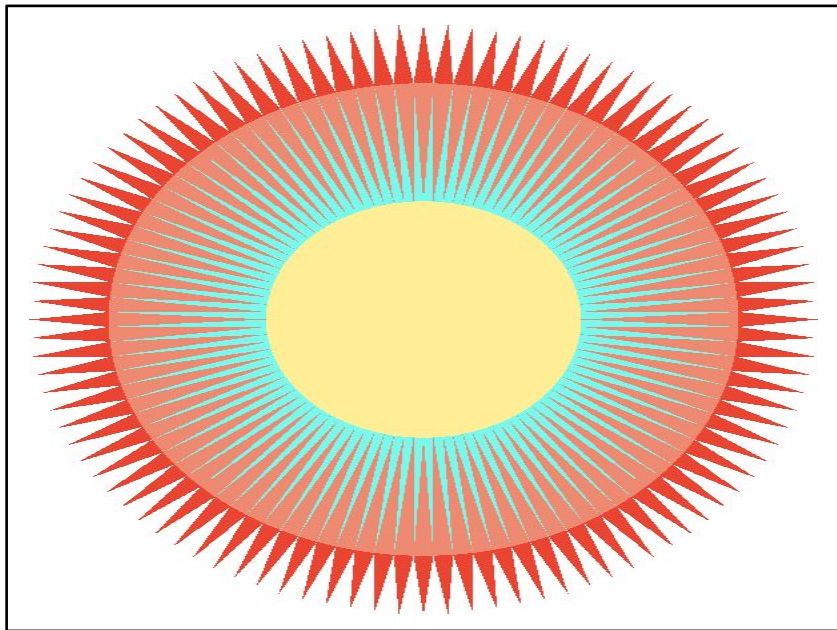

One sample per pixel

4x4 Supersampling + Downsampling

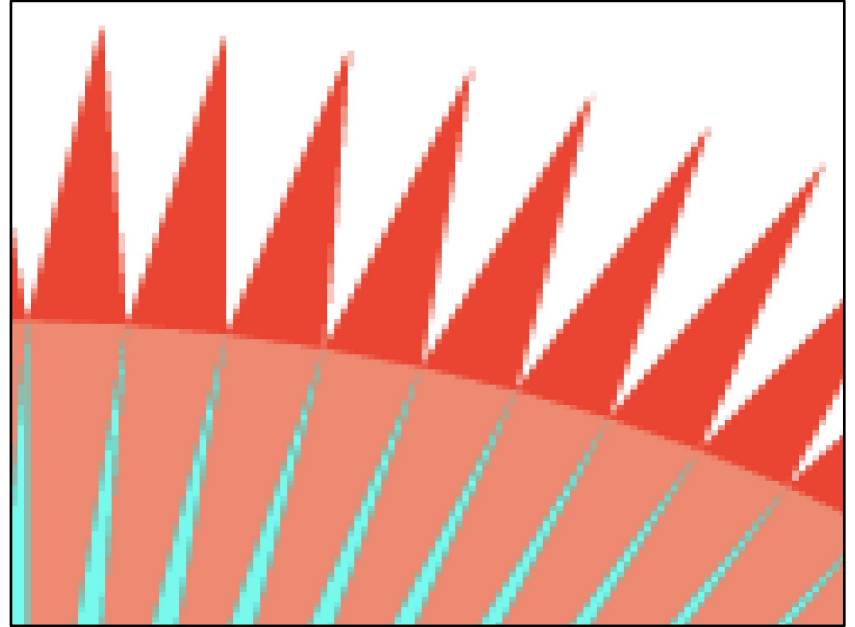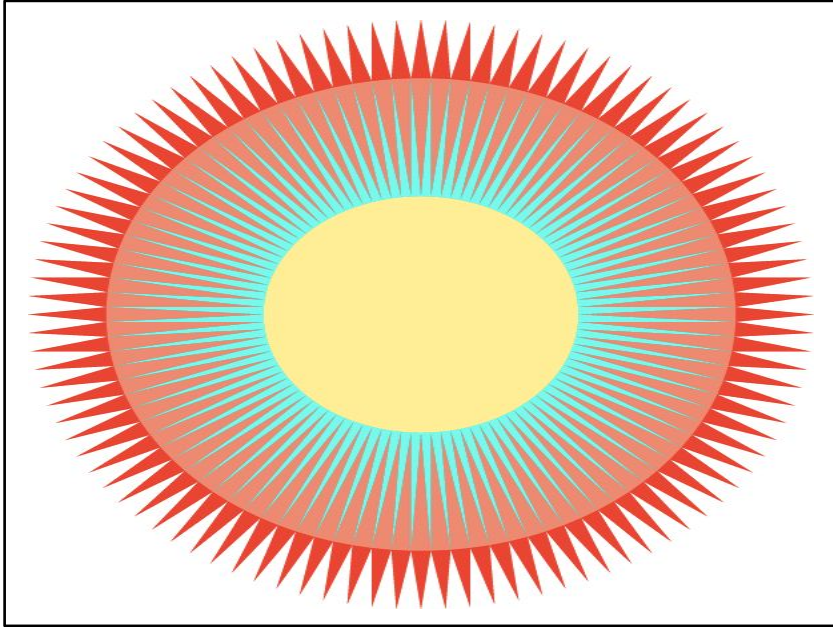

Pixel value is average of 4x4 samples per pixel

Antialiasing By Supersampling - Summary

- **Antialiasing = remove frequencies above Nyquist before sampling**
- **We can attenuate these frequencies quite well with a 1-pixel box filter (convolution)**
- **We approximated the 1-pixel box sampling by supersampling and averaging**
- **Simple, good idea - high image quality, but costly**
- **May feel “right”, but can get even higher quality!**

Things to Remember

Signal processing key concepts:

- Frequency domain vs spatial domain
- Filters in the frequency domain scale frequencies
- Filters in the sampling domain = convolution

Sampling and aliasing:

- Image generation involves sampling
- Nyquist frequency is half the sampling rate
- Frequencies above Nyquist appear as aliasing artifacts
- Antialiasing = filter out high frequencies before sampling
- Interpret supersampling as (approx) box pre-filter antialiasing

Acknowledgments

Thanks to Kayvon Fatahalian, Pat Hanrahan, Mark Pauly and Steve Marschner for slide resources.